INFRA

IDT 09 30 12 CL 76 ST WW

Artech Infra Round Tilt Deep Downlight

Artech Infra recessed architectural tilt LED downlight with ingress protection IP44. Total luminous flux up to 1393lm with overall luminaire efficacy of 88lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel.

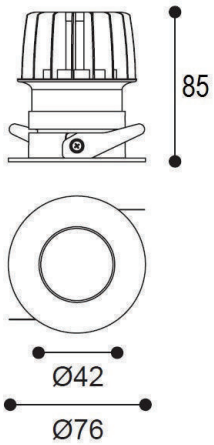

Mounting	Recessed
Lamp Type	LED
Wattage	10.4 W
Lumen output	900 lm
Efficacy	87 lm/W
Colour Temperature	3000 K
CRI	> 90
Beam angle	12 °
IP Rating	IP 44
Control Gear	Fixed Output
Dimensions	D = 76mm; H = 85mm
Colour Finish	White & White

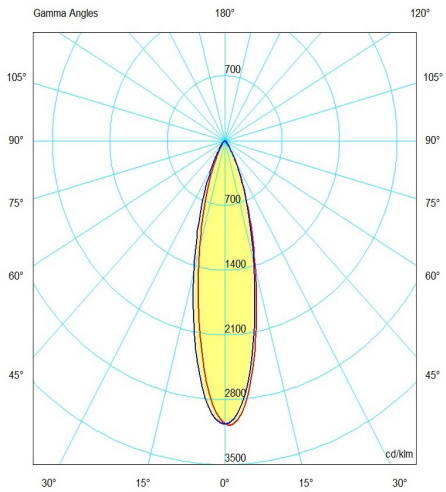

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%.Colour Temperature is subject to a tolerance of+/-150 Kelvin

ST. JOHNS RD, MEADOWFIELD INDUSTRIAL ESTATE, DURHAM, CO. DURHAM, DH7 8RJ - UNITED KINGDOM | T: +44 (0) 191 378 7960 - F: +44 (0) 191 378 7909 -WWW.ARTECHLIGHTING.COM