


Artech FlowLine Medium Suspended Direct / Indirect LED Luminaire

Architectural linear LED system for suspended applications. Total luminous flux up to 9671 lm with overall luminaire efficacy up to 131 lm/W. Supplied with fixed output or DALI digital dimmable driver. Optional - basic 3hr, self test or EMPRO emergency kit. Aluminum extruded body in white, black or silver finish. Opal polycarbonate optic for homogeneous illumination.



Mounting	Suspended
Lamp Type	LED
Wattage	43.4 W
Lumen output	5560 lm (available from 2557 to 9671 lm)
Efficacy	128 lm/W
Colour Temperature	4000 K
CRI	> 80
Optic	OD
IP Rating	IP 20
Control Gear	Fixed Output
Dimensions	1690mmx60mmx90mm
Colour Finish	White (RAL9010)
Service Lifetime	L 80 / B 10 - 60,000 Hrs
MacAdam	3

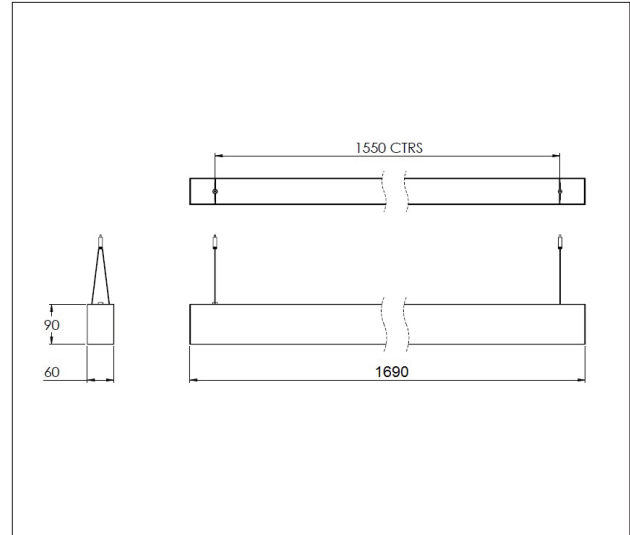