



Artech Prolight Surface Mounted Luminaire

Artech Prolight architectural LED luminaire with ingress protection IP66. Total luminous flux up to 8700lm with overall luminaire efficacy up to 133lm/W. Supplied with fixed output, DALI digital dimmable driver, optional 3 - hour Basic or EMPRO emergency kit. Steel housing with polycarbonate diffuser.

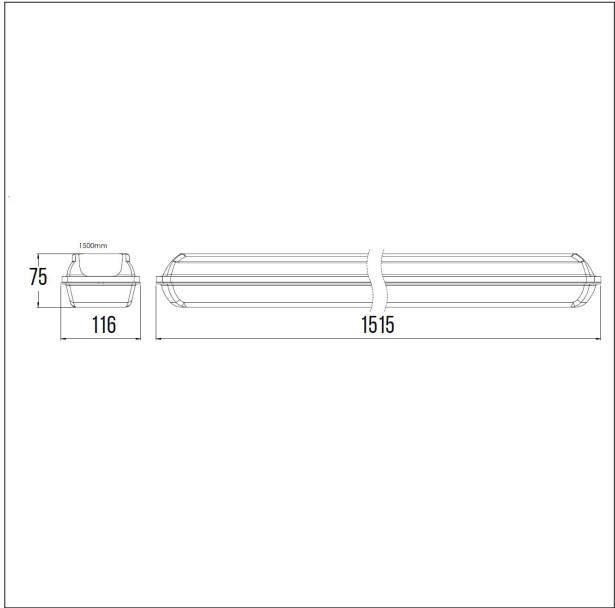

Mounting	Surface
Lamp Type	LED
Wattage	75 W
Lumen output	8700 lm
Efficacy	116 lm/W
Colour Temperature	4000 K
CRI	> 80
Optic	Polycarbonate Diffuser
IP Rating	IP 66
Control Gear	Fixed Output
Dimensions	1515mmx116mmx75mm
Colour Finish	Grey

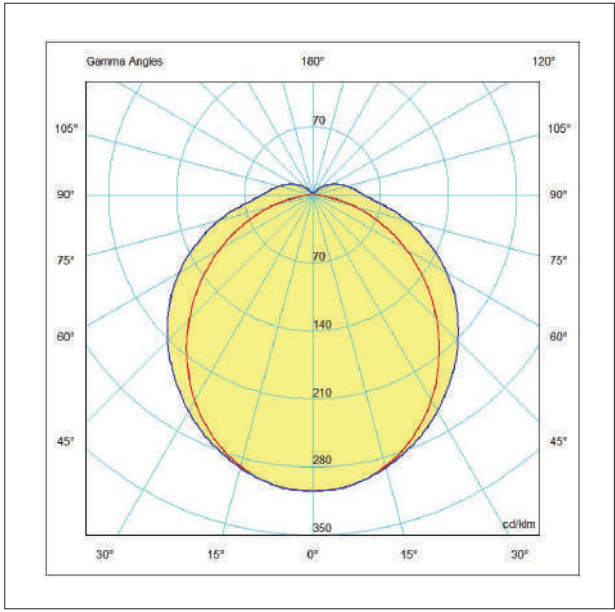

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/- 150 Kelvin