TENUS

TSN 09 30 38 CL 321 ST WWB

Artech Tenus Snoot Square Fixed Downlight

Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 900 lm with overall luminaire efficacy of 86 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3 -hour Basic or EMPRO emergency kit. Forged aluminum heat sink with die-cast white or black bezel.

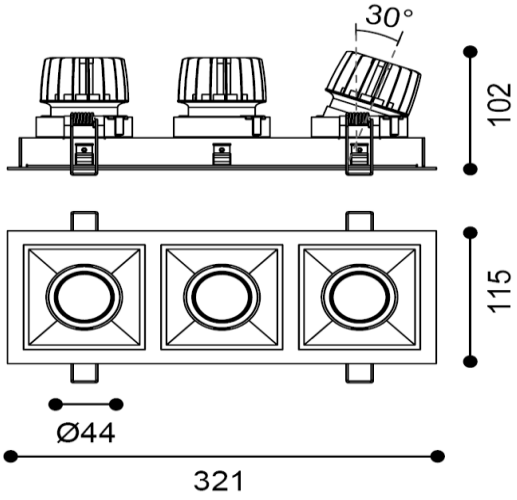

Mounting	Recessed With Trim
Lamp Type	3 x LED
Wattage	3 x 10.4 W
Lumen Output	3 x 900 lm
Efficacy	86 lm/W
Colour Temperature	3000 K
CRI	90+
Beam Angle	38°
IP Rating	IP44
Control Gear	Fixed Output
Dimensions	321 x 115 x 102 mm
Colour Finish	White/ White/ Black
MacAdam	3
Service Lifetime	L80/B10- 55,000 Hrs

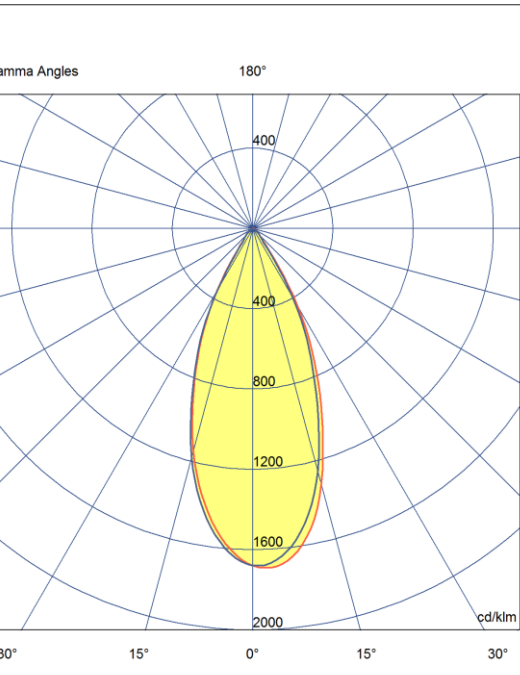

powered by

TRIDONIC

Driver details available upon request

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%.Colour Temperature is subject to a tolerance of +/-150 Kelvin

St.JohnsRd,MeadowfieldIndustrialEstate,Durham,Co.Durham,DH78RJ-UnitedKingdom|T:+44(0)1913787960-F:+44(0)1913787909-www.artechlighting.com

MADE IN BRITAIN