


INFRA 55

IST 03 30 60 CL 55 ST WB


ARTECH
LIGHTING

Artech Infra 55 Round Tilt Shallow Depth Downlight

Artech Infra recessed architectural Tilt LED downlight with ingress protection IP65. Total luminous flux up to 315 lm with overall luminaire efficacy of 102 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Forged aluminum heat sink with die-cast white or black bezel.

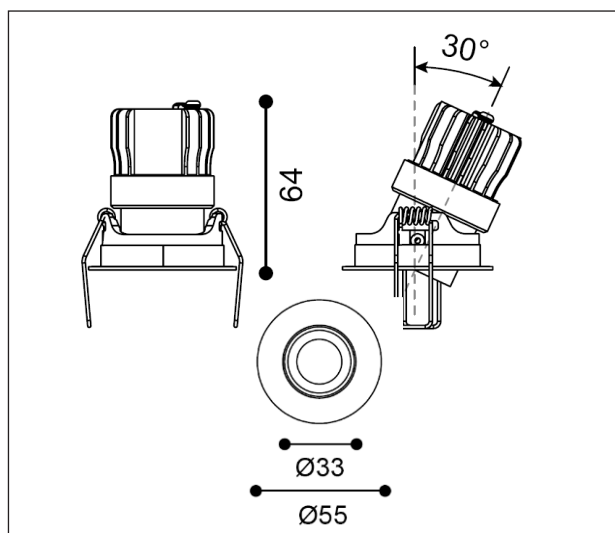

Mounting	Recessed (With Trim)
Lamp Type	LED
Wattage	3.1 W
Lumen Output	315 lm
Efficacy	102 lm/W
Colour Temperature	3000 K
CRI	80+
Beam Angle/Optic	60°/ Clear
IP Rating	IP65
Control Gear	Fixed Output
Dimension	55 Dia x 64 mm
Colour Finish	White/ Black
MacAdam	3
Service Lifetime	L80/B10-55,000 Hrs

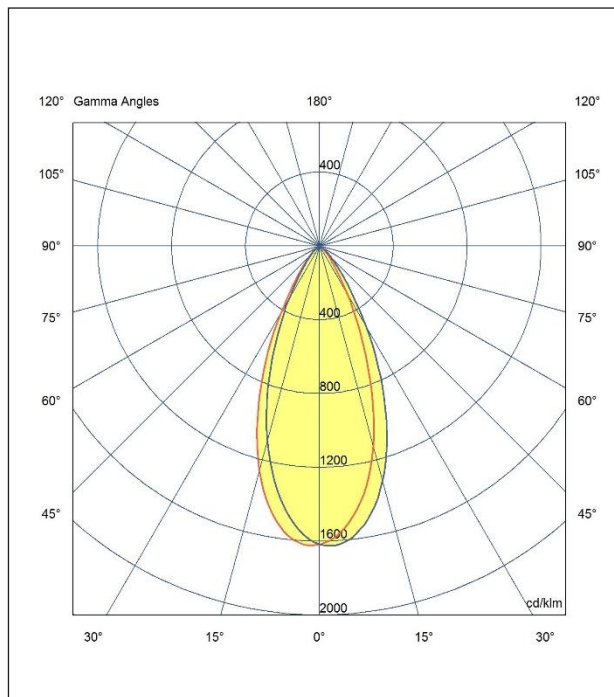

powered by

TRIDONIC

Driver details available upon request



Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up to +/- 10%. Colour Temperature is subject to a tolerance of +/- 150 Kelvin

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ – United Kingdom T: +44(0) 191 3787960 E: info@artechlighting.com W: www.artechlighting.com

