TENUS SQUARE TILT

TST 11 30 24 CL 85 ST WW

Artech Tenus Square Tilt Downlight

Artech Tenus recessed architectural tilt LED downlight with ingress protection IP20. Total luminous flux up to 1100 lm with overall luminaire efficacy of 88 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3 -hour Basic or EMPRO emergency kit. Forged aluminum heat sink with die-cast white or black bezel

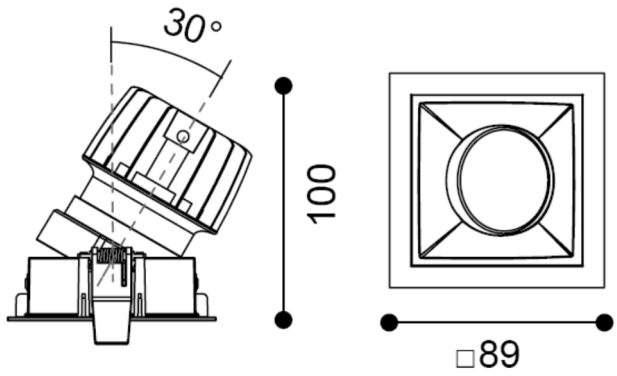

Mounting	Recessed (With Trim)
Lamp Type	LED
Wattage	12.5 W
Lumen Output	1100 lm
Efficacy	88 lm/W
Colour Temperature	3000 K
CRI	90+
Beam Angle/ Optic	24˚/ Clear
IP Rating	IP20
Control Gear	Fixed Output
Dimensions	89 x 89 x 100 mm
Colour Finish	White/ White
MacAdam	3
Service Lifetime	L80/B10-55,000 Hrs

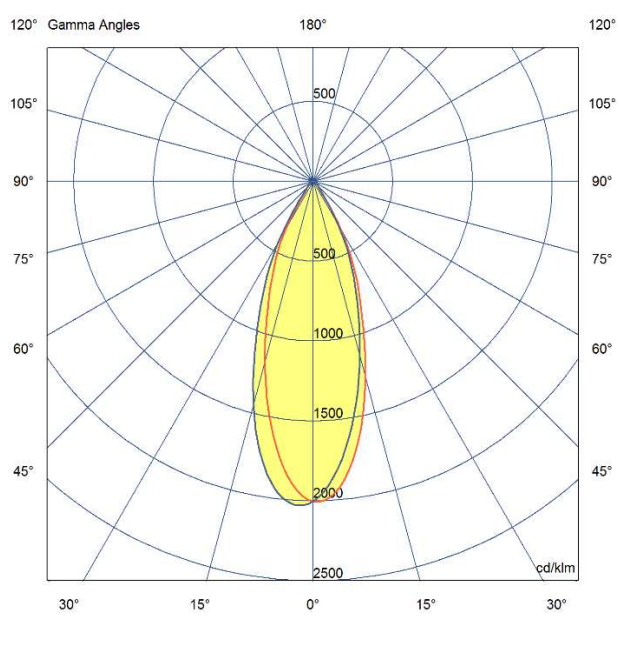

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%.Colour Temperature is subject to a tolerance of +/-150 Kelvin

St.Johns Rd, Meadowfield Industrial Estate, Durham, Co. Durham, DH7 8RJ - United Kingdom | T: +44 (0) 1913787960 - F: +44 (0) 1913787909 - www.artechlighting.com

MADE IN BRITAIN