


PROLIGHT 2

ARTECH
LIGHTING

Part Code: **AP2 57 40 PC C S**



Artech Prolight architectural LED luminaire with ingress protection IP66. Total luminous flux up to 11,385 lm with overall luminaire efficacy up to 161 lm/W. Supplied with fixed output, DALI digital dimmable driver, optional 3 – hour Basic or EMPRO emergency kit. Steel housing with polycarbonate diffuser.

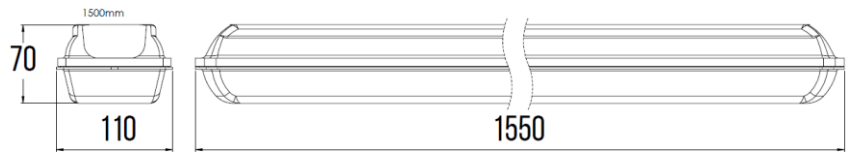


Production Information

–
Physical
Mounting Type – Surface
Length – 1550mm
Height – 70mm
Width – 110mm
Finish – Grey
IP Rating – IP66

–
Electrical
Lamp Type – LED
Wattage – 35.4 W
Efficacy – 158 lm/W
Driver – Tridonic/ Forge
Control – Fixed Output

–
LED
Manufacturer – Light Engines Europe
LED Type – LEE-LINEAR-24-STD-SAM
LED Pitch – 9.33mm
Delivered lumen output – 5692 lm
CCT – 4000K
CRI – 80+
MacAdam – 3
Service Lifetime – L80/B10 81,000hrs

–
Optic
Polycarbonate

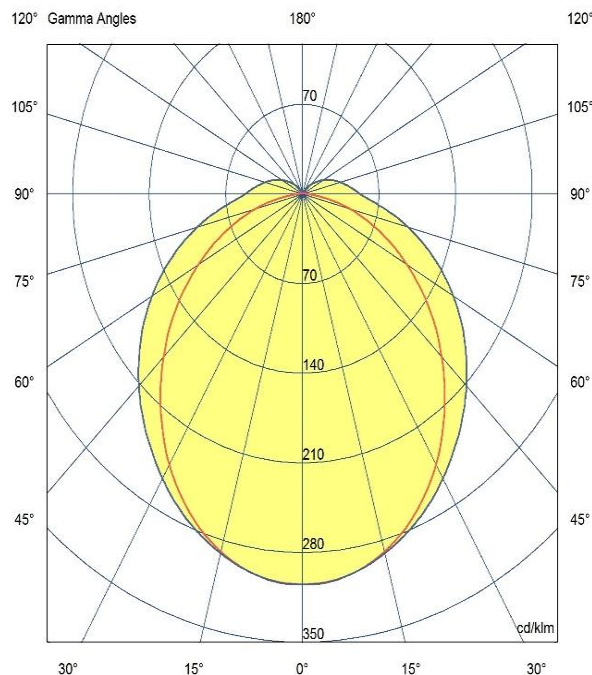

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

Powered by:

TRIDONIC

**MADE IN
BRITAIN UK
CA**