


# PROLIGHT 2

ARTECH  
LIGHTING

Part Code: **AP2 68 40 PC C S**



Artech Prolight architectural LED luminaire with ingress protection IP66. Total luminous flux up to 9108 lm with overall luminaire efficacy up to 158 lm/W. Supplied with fixed output, DALI digital dimmable driver, optional 3 – hour Basic or EMPRO emergency kit. Steel housing with polycarbonate diffuser.

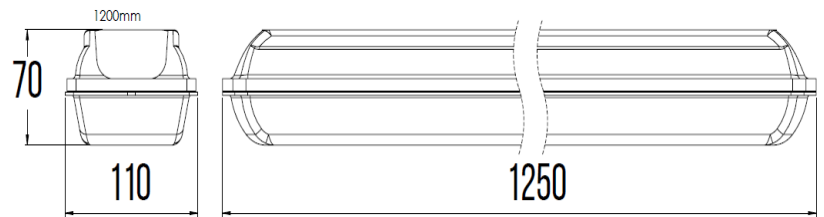


## Production Information

–  
**Physical**  
Mounting Type – Surface  
Length – 1250mm  
Height – 70mm  
Width – 110mm  
Finish – Grey  
IP Rating – IP66

–  
**Electrical**  
Lamp Type – LED  
Wattage – 43.2 W  
Efficacy – 158 lm/W  
Driver – Tridonic/ Forge  
Control – Fixed Output

–  
**LED**  
Manufacturer – Light Engines Europe  
LED Type – LEE-LINEAR-24-STD-SAM  
LED Pitch – 9.33mm  
Delivered lumen output – 6831lm  
CCT – 4000K  
CRI – 80+  
MacAdam – 3  
Service Lifetime – L80/B10 81,000hrs

–  
**Optic**  
Polycarbonate

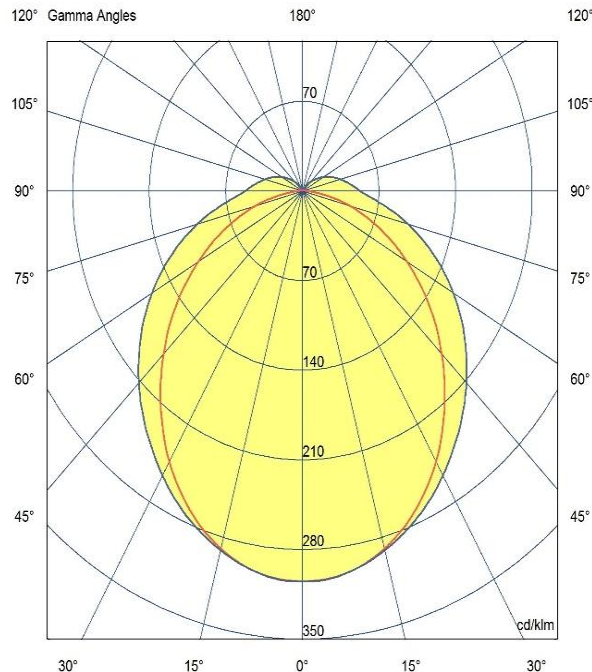

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

Powered by:

**TRIDONIC**

**MADE IN  
BRITAIN UK  
CA**