# TENUS SQUARE SNOOT

Part Code: **TSN 05 30 38 CL 218 ST WWB**

Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 1900 lm with overall luminaire efficacy of 89 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3 -hour Basic or EMPRO emergency kit. Forged aluminum heat sink with die-cast white or black bezel.

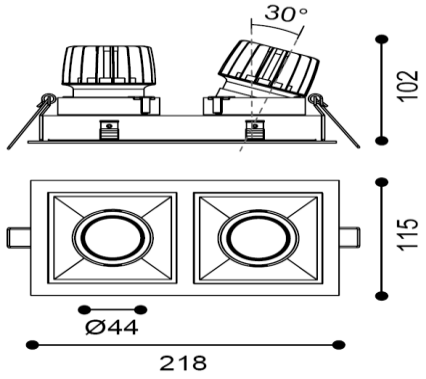


## Production Information

–
**Physical**
Mounting Type – Recessed (With Trim)
Length – 218mm
Height – 102mm
Width – 115mm
Finish – White/White/Black
RAL – 9010
IP Rating – IP44

–
**Electrical**
Lamp Type – LED
Wattage – 6.3 W
Efficacy – 89 lm/W
Driver – Tridonic/Forge
Control – Fixed Output

–
**LED**
Manufacturer – Citizen
LED Type – CLU028/120C4
Delivered lumen output – 500lm
CCT – 3000K
CRI – 90+
MacAdam – < 3
Service Lifetime – L80/B10 55,000hrs

–
**Optic**
38° Beam Angle/ Clear Optic

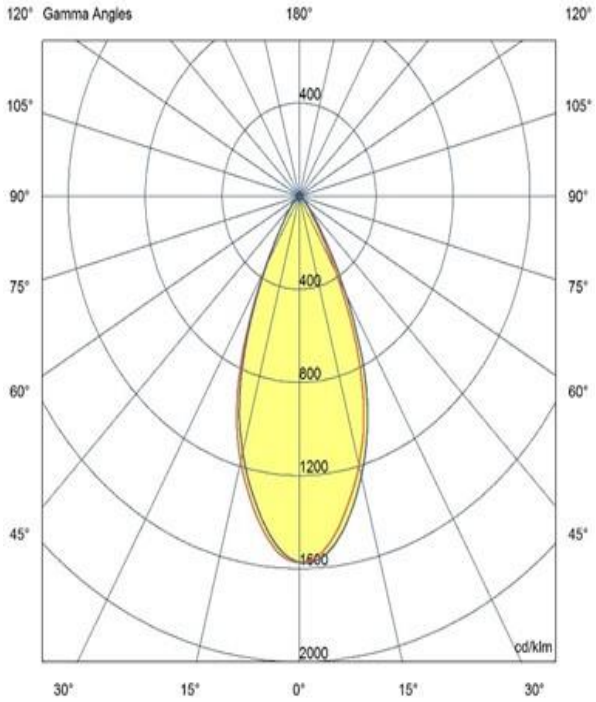


Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**
**T: +44(0) 191 3787960 E: info@artechlighting.com**

Powered by:
TRIDONIC

MADE IN BRITAIN UK CA