TENUS SQUARE SNOOT

Part Code: **TSN 13 30 60 CL 115 ST WWB**

Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 1900 lm with overall luminaire efficacy of 89 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3 -hour Basic or EMPRO emergency kit. Forged aluminum heat sink with die-cast white or black bezel.

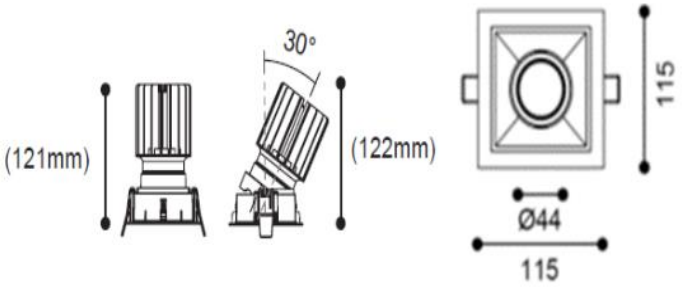

Production Information

–
Physical
Mounting Type – Recessed (With Trim)
Length – 115mm
Height – 121mm
Width – 115mm
Finish – White/White/Black
RAL – 9010
IP Rating – IP44

–
Electrical
Lamp Type – LED
Wattage – 14.6 W
Efficacy – 89 lm/W
Driver – Tridonic/Forge
Control – Fixed Output

–
LED
Manufacturer – Citizen
LED Type – CLU028/120C4
Delivered lumen output – 1300lm
CCT – 3000K
CRI – 90+
MacAdam – < 3
Service Lifetime – L80/B10 55,000hrs

–
Optic
60° Beam Angle/ Clear Optic

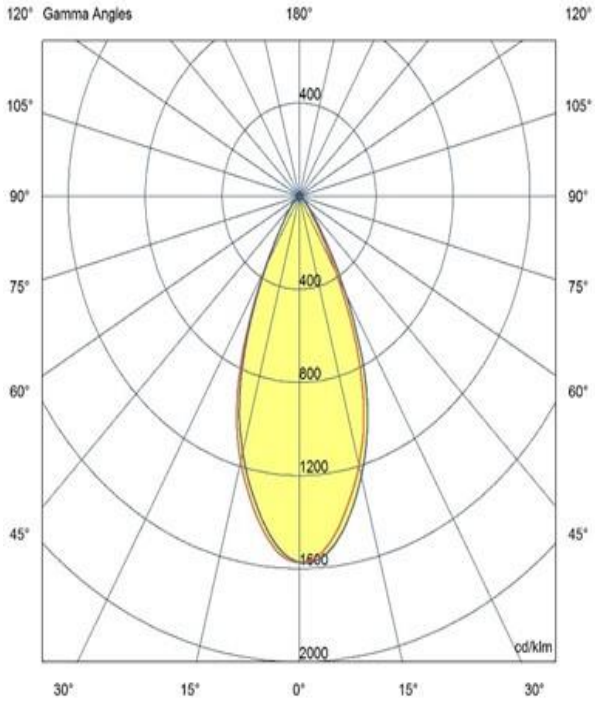

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

Powered by:
TRIDONIC

MADE IN BRITAIN UK CA