


# TENUS CURVE

ARTECH  
LIGHTING

Part Code: **TCD 06 40 50 CL 86 ST WW D**



The Artech Tenus Curve is a high-performance LED downlight, available with a standard recessed trim or plaster-in trimless option. The smooth curved design provides a sleek and elegant look, available in a white or black finish, with optional white, black or gold baffle for additional glare control. Performance up to 1531lm with a high colour rendering index of 80+, controlled by either a DALI or fixed output driver with an optional 3hr basic or addressable/self-test emergency kit. The Tenus Curve is a versatile, energy-efficient lighting solution suitable for any indoor space.

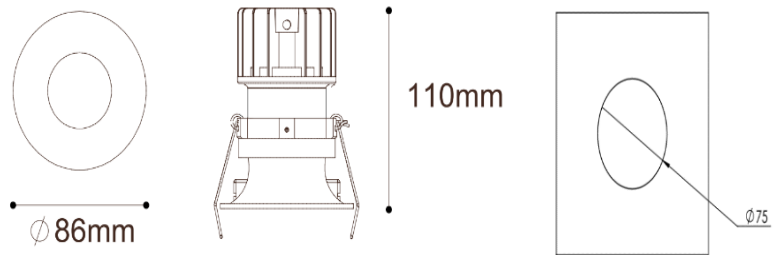


## Production Information

–  
**Physical**  
Mounting Type – Recessed (With Trim)  
Height – 110mm  
Diameter – 86mm  
Cutout – 75mm  
Finish – White/White  
IP Rating – IP44

–  
**Electrical**  
Lamp Type - LED  
Wattage – 6.6 W  
Efficacy – 88lm/W  
Driver – Tridonic/Osram  
Control – DALI2

–  
**LED**  
Manufacturer – Citizen  
LED Type – CLU02Q/1202E1  
Delivered lumen output – 581lm  
CCT – 4000K  
CRI – 80+  
MacAdam – < 2  
Service Lifetime – L80/B10 72,000 Hrs

–  
**Optic**  
50°/ Clear

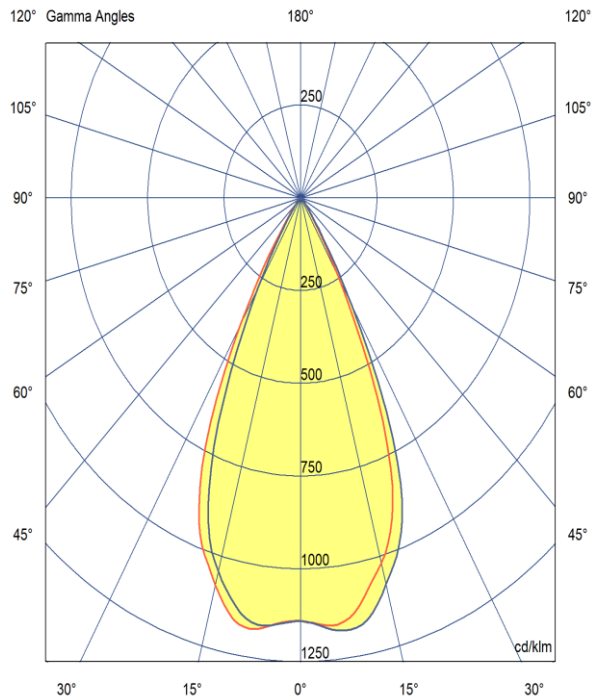

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

**MADE IN  
BRITAIN** **UK  
CA**