



TENUS CURVE

ARTECH
LIGHTING

Part Code: **TCD 11 40 24 CL 86 TL WW D**

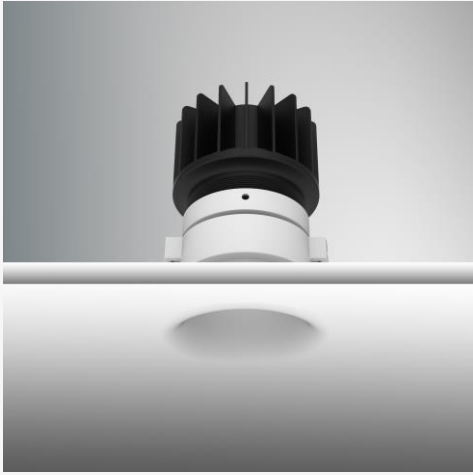

The Artech Tenus Curve is a high-performance LED downlight, available with a standard recessed trim or plaster-in trimless option. The smooth curved design provides a sleek and elegant look, available in a white or black finish, with optional white, black or gold baffle for additional glare control. Performance up to 1531lm with a high colour rendering index of 80+, controlled by either a DALI or fixed output driver with an optional 3hr basic or addressable/self-test emergency kit. The Tenus Curve is a versatile, energy-efficient lighting solution suitable for any indoor space.

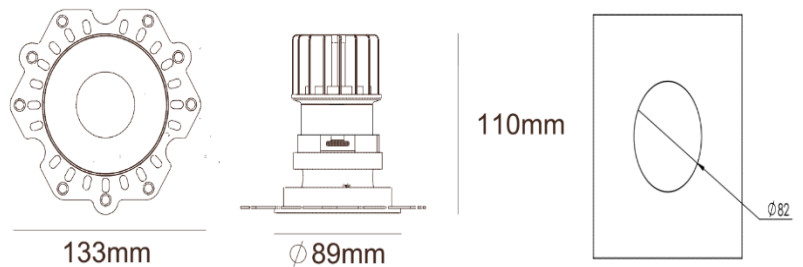


Production Information

–
Physical
Mounting Type – Recessed (Trimless)
Height – 110mm
Diameter – 89mm
Cutout – 82mm
Finish – White/White
IP Rating – IP44

–
Electrical
Lamp Type - LED
Wattage – 12.9 W
Efficacy – 88lm/W
Driver – Tridonic/Osram
Control – DALI2

–
LED
Manufacturer – Citizen
LED Type – CLU02Q/1202E1
Delivered lumen output – 1135lm
CCT – 4000K
CRI – 80+
MacAdam – < 2
Service Lifetime – L80/B10 72,000 Hrs

–
Optic
24°/ Clear

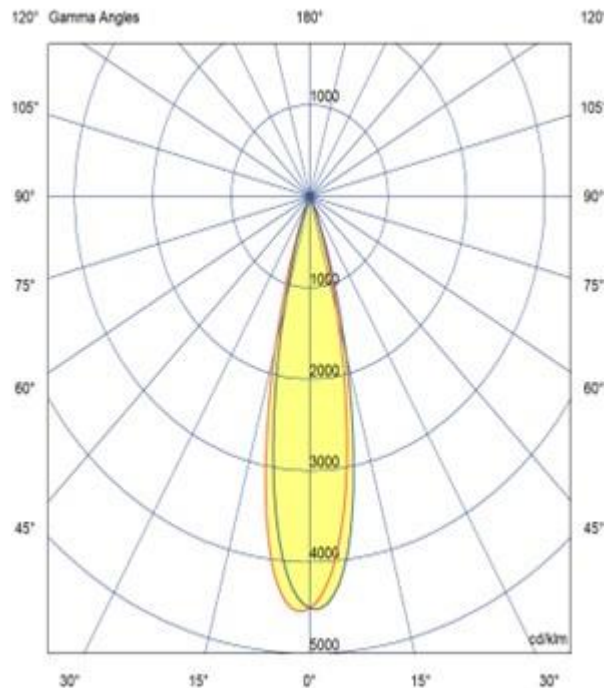

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

**MADE IN
BRITAIN** **UK
CA**