TENUS CURVE



Part Code: TCI 06 40 15 CL 86 ST W D



The Artech Tenus Curve is a high-performance LED downlight, available with a standard recessed trim or plaster-in trimless option. The smooth curved design provides a sleek and elegant look, available in a white or black finish, with optional white, black or gold baffle for additional glare control. Performance up to 1531Im with a high colour rendering index of 80+, controlled by either a DALI or fixed output driver with an optional 3hr basic or addressable/self-test emergency kit. The Tenus Curve is a versatile, energyefficient lighting solution suitable for any indoor space.



Production Information

-

Physical Mounting Type – Recessed (With Trim) Height – 93mm Diameter – 86mm Cutout – 75mm Finish – White IP Rating – IP65

Ξ.


Electrical Lamp Type - LED Wattage – 6.6 W Efficacy – 88lm/W Driver – Tridonic/Osram Control – DALI2

-

LED Manufacturer – Citizen LED Type – CLU02Q/1202E1 Delivered lumen output – 581Im CCT – 4000K CRI – 80+ MacAdam – < 2 Service Lifetime – L80/B10 72,000 Hrs

-

Optic 15°/ Clear

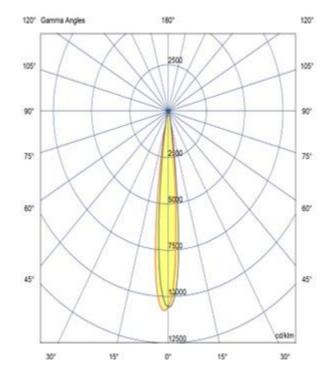

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom T: +44(0) 191 3787960 E: info@artechlighting.com

