


# TENUS IP65

ARTECH  
LIGHTING

Part Code: **TR6 12 40 24 CL 142 ST W**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP65. Total luminous flux up to 1387lm with overall luminaire efficacy of 108 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black colour finish.

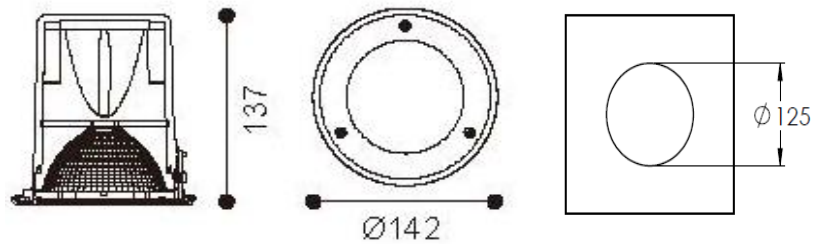


## Production Information

–  
**Physical**  
Mounting Type – Recessed (With Trim)  
Height – 137mm  
Diameter – 142mm  
Cutout – 125mm  
Finish – White  
IP Rating – IP65

–  
**Electrical**  
Lamp Type - LED  
Wattage – 11 W  
Efficacy – 108lm/W  
Driver – Tridonic/Osram  
Control – Fixed Output

–  
**LED**  
Manufacturer – Citizen  
LED Type – CLU02Q/1202E1  
Delivered lumen output – 1188lm  
CCT – 4000K  
CRI – 90+  
MacAdam – < 3  
Service Lifetime – L80/B10 55,000 Hrs

–  
**Optic**  
24°/ Clear

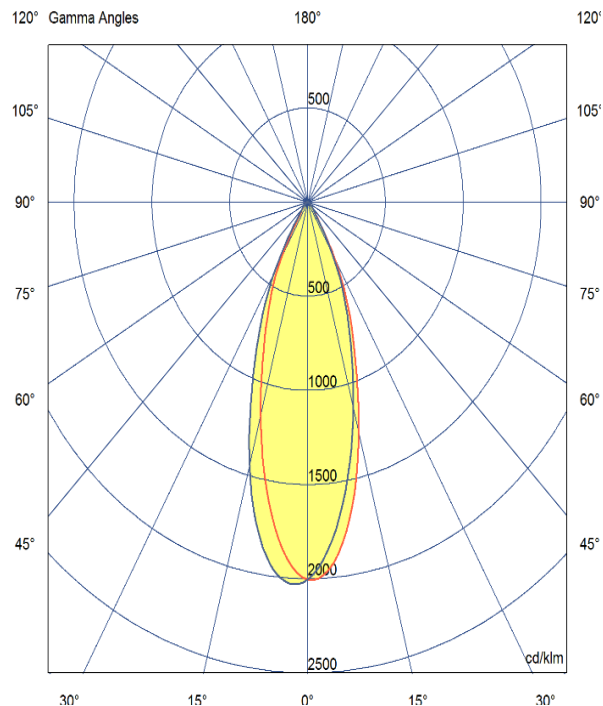

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

**MADE IN  
BRITAIN** **UK  
CA**