


TENUS IP65

ARTECH
LIGHTING

Part Code: **TR6 14 40 24 CL 142 ST W**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP65. Total luminous flux up to 1387lm with overall luminaire efficacy of 108 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black colour finish.

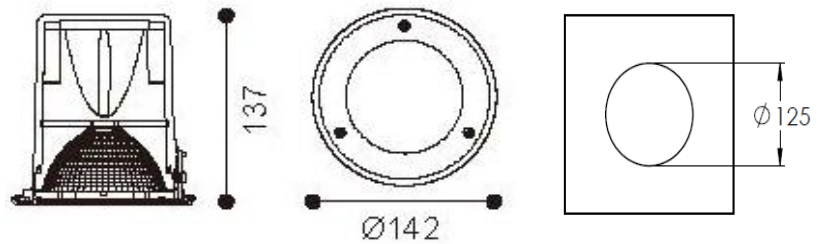


Production Information

–
Physical
Mounting Type – Recessed (With Trim)
Height – 137mm
Diameter – 142mm
Cutout – 125mm
Finish – White
IP Rating – IP65

–
Electrical
Lamp Type - LED
Wattage – 12.8 W
Efficacy – 108lm/W
Driver – Tridonic/Osram
Control – Fixed Output

–
LED
Manufacturer – Citizen
LED Type – CLU02Q/1202E1
Delivered lumen output – 1387lm
CCT – 4000K
CRI – 90+
MacAdam – < 3
Service Lifetime – L80/B10 55,000 Hrs

–
Optic
24°/ Clear

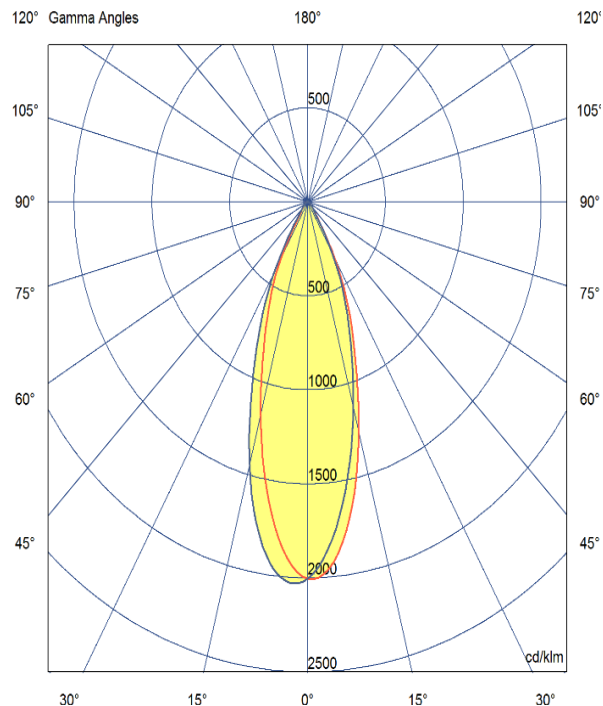

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

**MADE IN
BRITAIN** **UK
CA**