


# TENUS 40 ROUND FIX

ARTECH  
LIGHTING

Part Code: **TRF 03 30 38 CL 40 ST W**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP20. Total luminous flux up to 260 lm with overall luminaire efficacy of 87 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, due to dimensions of the Tenus Mini Range remote access driver required. optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel.

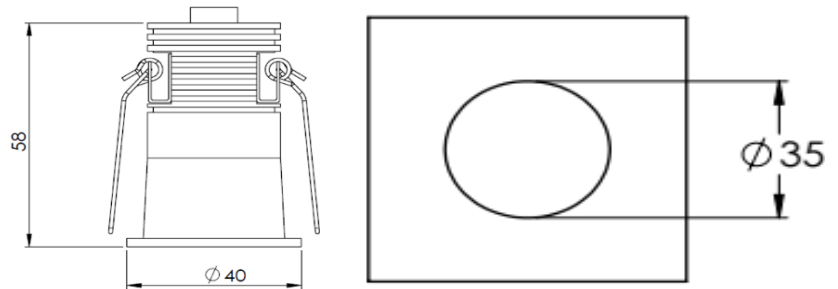


## Production Information

–  
**Physical**  
Mounting Type – Recessed (With Trim)  
Height – 58mm  
Diameter – 40mm  
Cutout – 35mm  
Finish – White  
IP Rating – IP20

–  
**Electrical**  
Lamp Type – LED  
Wattage – 3W  
Efficacy – 87 lm/W  
Driver – Tridonic/Osram  
Control – Fixed Output – Remote Access Required

–  
**LED**  
Manufacturer – CREE  
LED Type – CXB1304  
Delivered lumen output – 260lm  
CCT – 3000K  
CRI – 80+  
MacAdam – < 3  
Service Lifetime – L80/B10 55,000hrs

–  
**Optic**  
38° Beam Angle/ Clear Optic

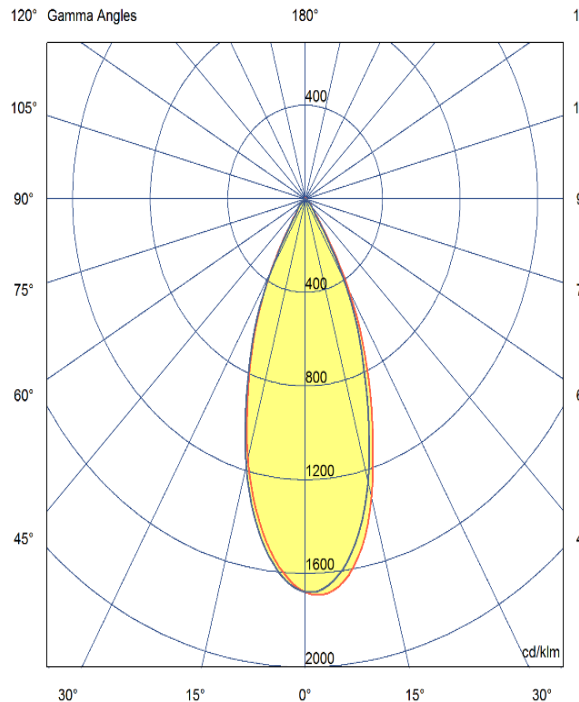

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

**MADE IN  
BRITAIN** **UK  
CA**