


TENUS 60 ROUND FIX

ARTECH
LIGHTING

Part Code: **TRF 05 30 38 CL 60 ST W**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP20. Total luminous flux up to 560 lm with overall luminaire efficacy of 87 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, due to dimensions of the Tenus Mini Range remote access driver required. optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel.

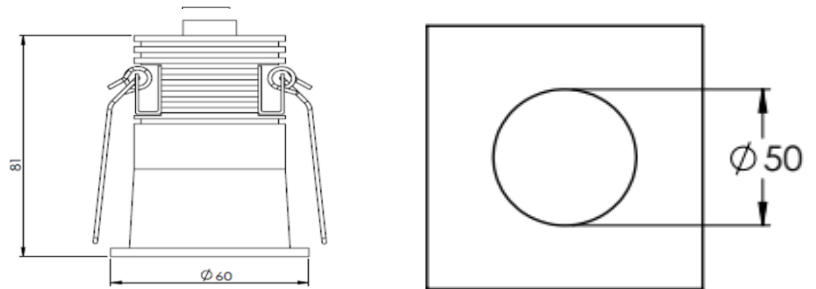


Production Information

–
Physical
Mounting Type – Recessed (With Trim)
Height – 81mm
Diameter – 60mm
Cutout – 50mm
Finish – White
IP Rating – IP20

–
Electrical
Lamp Type – LED
Wattage – 5.6 W
Efficacy – 87 lm/W
Driver – Tridonic/Osram
Control – Fixed Output – Remote Access Required

–
LED
Manufacturer – CREE
LED Type – CXB1304
Delivered lumen output – 490lm
CCT – 3000K
CRI – 80+
MacAdam – < 3
Service Lifetime – L80/B10 55,000hrs

–
Optic
38° Beam Angle/ Clear Optic

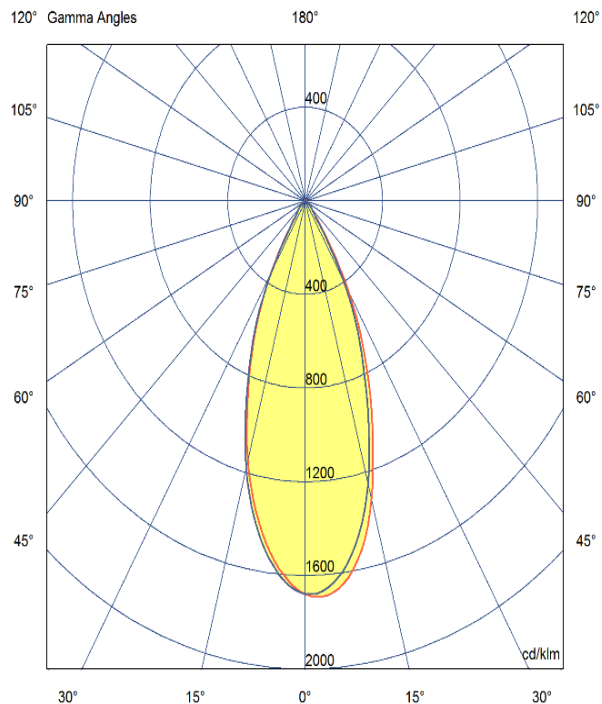

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

**MADE IN
BRITAIN** **UK
CA**