


# TENUS 60 ROUND FIX

ARTECH  
LIGHTING

Part Code: **TRF 05 40 38 CL 60 ST W**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP20. Total luminous flux up to 560 lm with overall luminaire efficacy of 87 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, due to dimensions of the Tenus Mini Range remote access driver required. optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel.

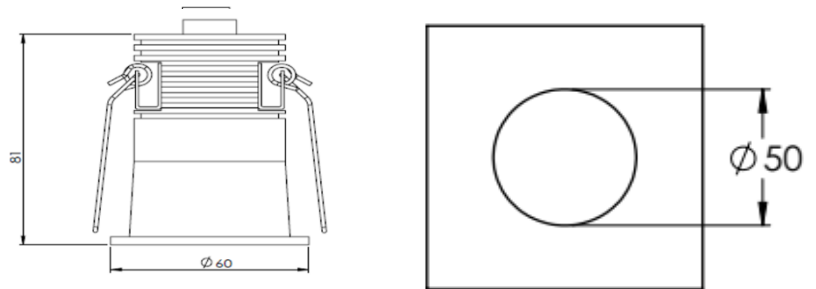


## Production Information

–  
**Physical**  
Mounting Type – Recessed (With Trim)  
Height – 81mm  
Diameter – 60mm  
Cutout – 50mm  
Finish – White  
IP Rating – IP20

–  
**Electrical**  
Lamp Type – LED  
Wattage – 5.6 W  
Efficacy – 87 lm/W  
Driver – Tridonic/Osram  
Control – Fixed Output – Remote Access Required

–  
**LED**  
Manufacturer – CREE  
LED Type – CXB1304  
Delivered lumen output – 490lm  
CCT – 4000K  
CRI – 80+  
MacAdam – < 3  
Service Lifetime – L80/B10 55,000hrs

–  
**Optic**  
38° Beam Angle/ Clear Optic

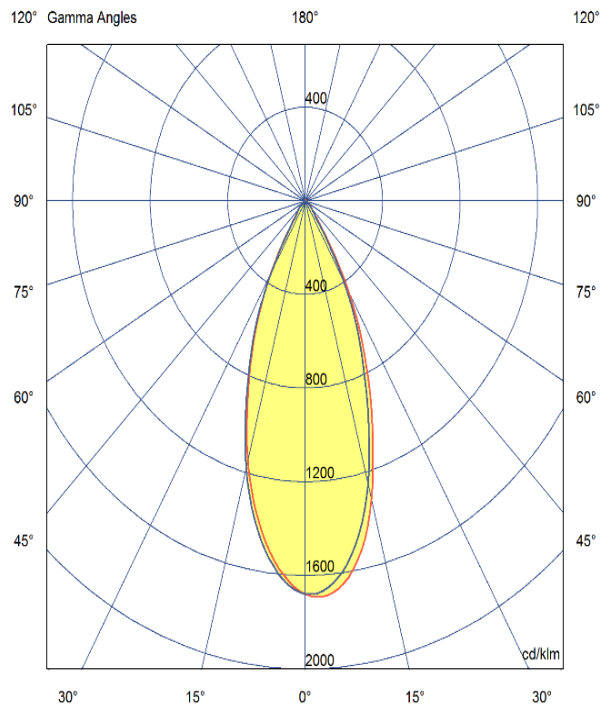

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom  
T: +44(0) 191 3787960 E: info@artechlighting.com

MADE IN  
BRITAIN UK  
CA