
<u>TENUS 90</u>



Part Code: TRF 14 40 60 CL 90 P BB



Artech Tenus pendant architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 3000 lm with overall luminaire efficacy of 100 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3 -hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel.



Production Information

-

Physical Mounting Type – Pendant Length – 270mm Diameter – 90mm Finish – Black/Black IP Rating – IP44

Electrical


Lamp Type – LED Wattage – 14 W Efficacy – 100lm/W Driver – Tridonic/Osram Control – Fixed Output

– LED

Manufacturer – Phillips Lumileds LED Type – COB 120s Delivered lumen output – 1400lm CCT – 4000K CRI – 90+ MacAdam – < 3 Service Lifetime – L80/B10 55,000hrs

– Optic

60° Beam Angle/ Clear Optic

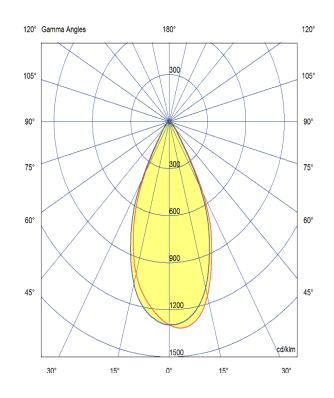

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom T: +44(0) 191 3787960 E: info@artechlighting.com

