


TENUS 167

ARTECH
LIGHTING

Part Code: **TRF 16 40 90 CL 167 TL WW**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 2425 lm with overall luminaire efficacy of 125 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel.

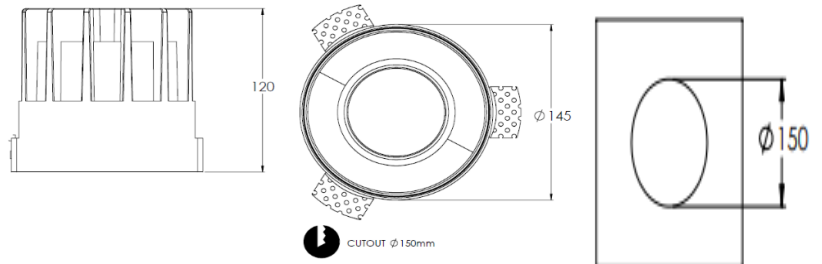


Production Information

–
Physical
Mounting Type – Recessed (Trimless)
Height – 120mm
Diameter – 167mm
Cutout – 150mm
Finish – White/White
IP Rating – IP44

–
Electrical
Lamp Type – LED
Wattage – 12.8 W
Efficacy – 125 lm/W
Driver – Tridonic/Osram
Control – Fixed Output

–
LED
Manufacturer – Phillips Lumileds
LED Type – COB 1208
Delivered lumen output – 1600lm
CCT – 4000K
CRI – 90+
MacAdam – < 3
Service Lifetime – L80/B10 55,000hrs

–
Optic
90° Beam Angle/ Clear Optic

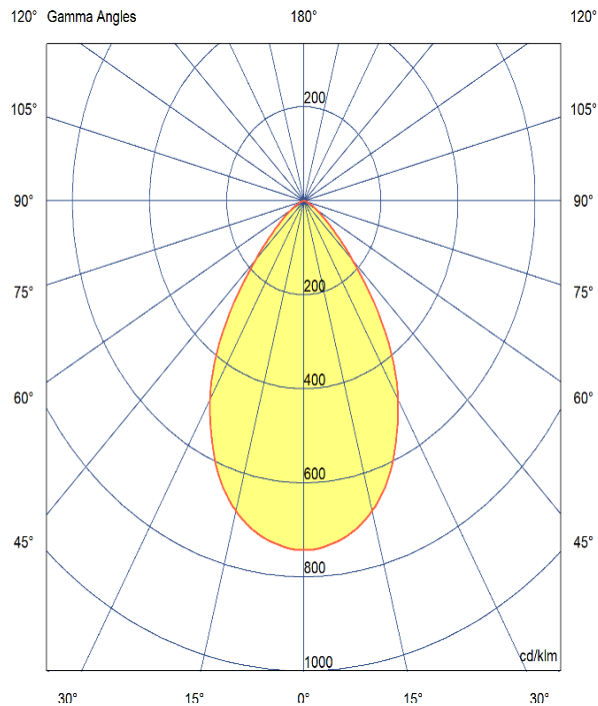

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

**MADE IN
BRITAIN** **UK
CA**