


# TENUS 197

ARTECH  
LIGHTING

Part Code: **TRF 32 40 90 CL 197 ST WW**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 3360 lm with overall luminaire efficacy of 125 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel.

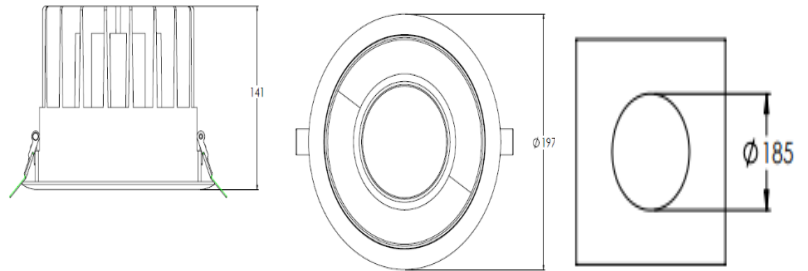


## Production Information

–  
**Physical**  
Mounting Type – Recessed (With Trim)  
Height – 141mm  
Diameter – 197mm  
Cutout – 185mm  
Finish – White/White  
IP Rating – IP44

–  
**Electrical**  
Lamp Type – LED  
Wattage – 25.6 W  
Efficacy – 125 lm/W  
Driver – Tridonic/Osram  
Control – Fixed Output

–  
**LED**  
Manufacturer – Phillips Lumileds  
LED Type – COB 1208  
Delivered lumen output – 3200lm  
CCT – 4000K  
CRI – 90+  
MacAdam – < 3  
Service Lifetime – L80/B10 55,000hrs

–  
**Optic**  
90° Beam Angle/ Clear Optic

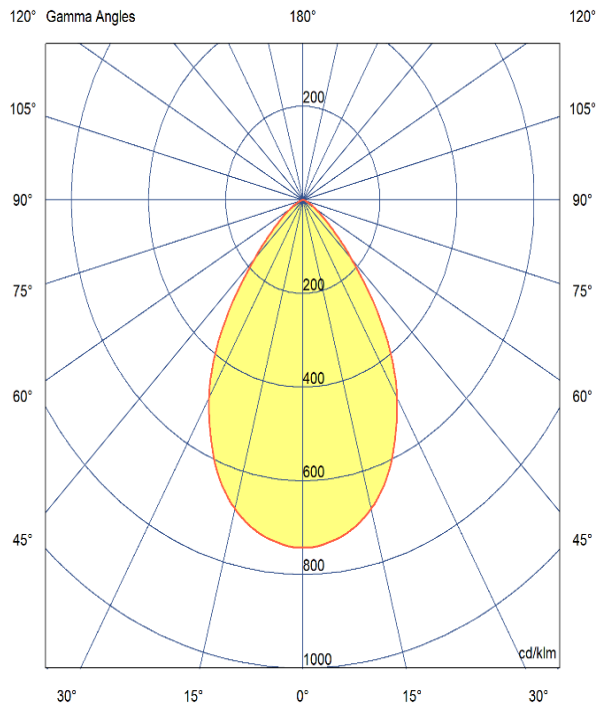

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

**MADE IN  
BRITAIN** **UK  
CA**