


# TENUS ROUND SNOOT

ARTECH  
LIGHTING

Part Code: **TRN 07 40 24 CL 85 TL WWB**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 1408 lm with overall luminaire efficacy of 109 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel.

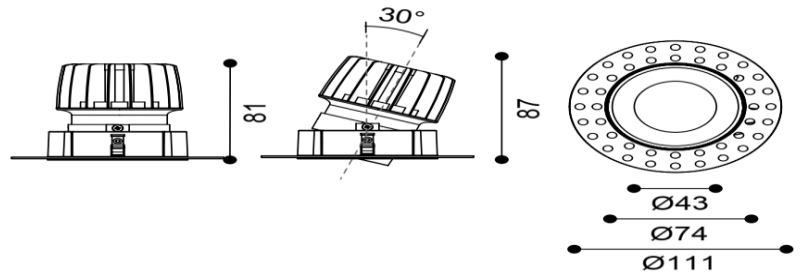


## Production Information

–  
**Physical**  
Mounting Type – Recessed (Trimless)  
Diameter – 74mm  
Height – 87mm  
Finish – White/White/Black  
RAL – 9010  
IP Rating – IP44

–  
**Electrical**  
Lamp Type – LED  
Wattage – 6.6 W  
Efficacy – 109 lm/W  
Driver – Tridonic/Osram  
Control – Fixed Output

–  
**LED**  
Manufacturer – Citizen  
LED Type – CLU028/120C4  
Delivered lumen output – 724lm  
CCT – 4000K  
CRI – 90+  
MacAdam – < 3  
Service Lifetime – L80/B10 55,000hrs

–  
**Optic**  
24° Beam Angle/ Clear Optic

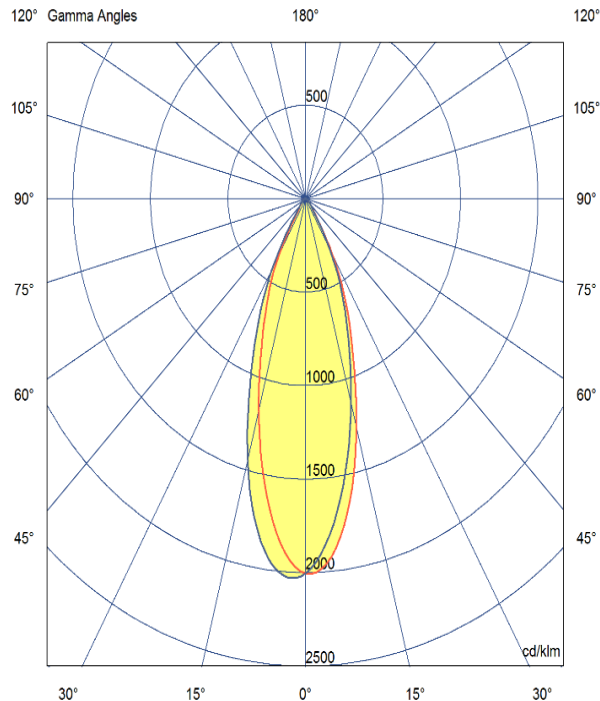

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
T: +44(0) 191 3787960 E: [info@artechlighting.com](mailto:info@artechlighting.com)

**MADE IN  
BRITAIN** **UK  
CA**