


TENUS 85

ARTECH
LIGHTING

Part Code: **TRT 10 40 15 CL 85 TL WW D**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 1900 lm with overall luminaire efficacy of 109 lm/W. CRI 80+ and 2700K, 3000K & 4000K available as standard. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel. Optional extras such as CRI 90+, Tuneable White, Dim to Warm, Frosted/honeycomb lens available upon request.

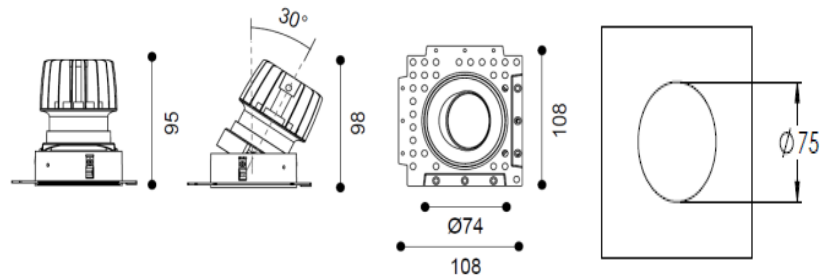


Production Information

–
Physical
Mounting Type – Recessed (Trimless)
Height – 98mm
Diameter – 74mm
Cutout – 75mm
Finish – White/White
IP Rating – IP44

–
Electrical
Lamp Type - LED
Wattage – 9.2 W
Efficacy – 109lm/W
Driver – Tridonic/Osram
Control – DALI2

–
LED
Manufacturer – Citizen
LED Type – CLU02Q/1202E1
Delivered lumen output – 1006lm
CCT – 4000K
CRI – 80+
MacAdam – < 2
Service Lifetime – L80/B10 72,000 Hrs

–
Optic
15°/ Clear

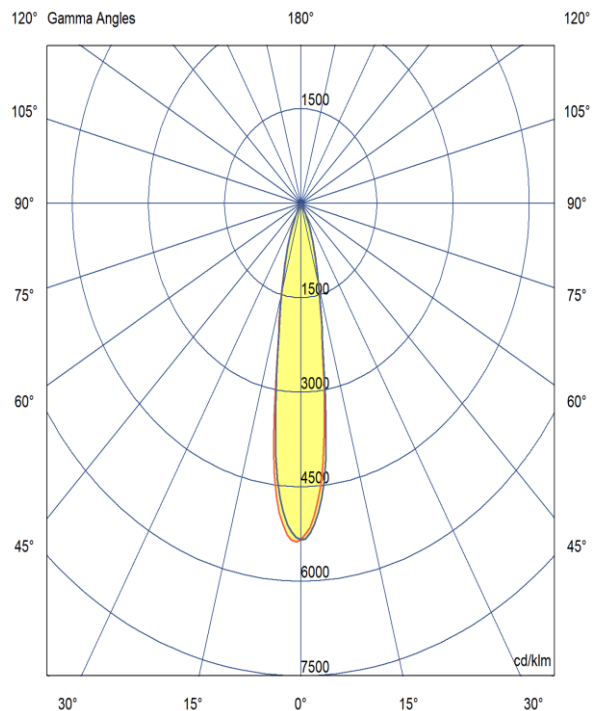

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

**MADE IN
BRITAIN** **UK
CA**