
# <u>TENUS 90</u>



## Part Code: TRT 10 40 60 CL 90 S BB



Tenus 90 is an elegant directional surface spotlight, with high quality aluminium housing and discrete hinge design allowing for concise adjustment. Total luminous flux up to 3000 Im with overall luminaire efficacy of 100 Im/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3 -hour Basic or EMPRO emergency kit. Forged aluminium heat sink with diecast white or black bezel.



## **Production Information**

#### \_...

Physical Mounting Type – Surface Length – 192mm Diameter – 90mm Finish – Black/Black IP Rating – IP20

### Electrical


Lamp Type – LED Wattage – 10 W Efficacy – 100lm/W Driver – Tridonic/Osram Control – Fixed Output

#### – LED

Manufacturer – Phillips Lumileds LED Type – COB 1280 Delivered lumen output – 1000lm CCT – 4000K CRI – 90+ MacAdam – <3 Service Lifetime – L80/B10 55,000hrs

#### – Optic

60° Beam Angle/ Clear Optic

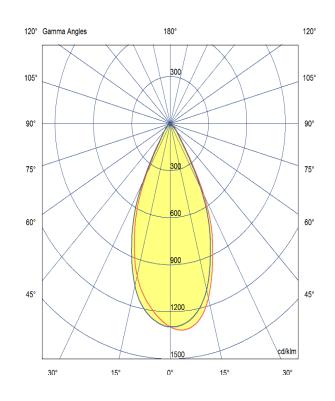

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom T: +44(0) 191 3787960 E: info@artechlighting.com

