


# TENUS 85

ARTECH  
LIGHTING

Part Code: **TRT 14 40 50 CL 85 ST WW D**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 1900 lm with overall luminaire efficacy of 109 lm/W. CRI 80+ and 2700K, 3000K & 4000K available as standard. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel. Optional extras such as CRI 90+, Tuneable White, Dim to Warm, Frosted/honeycomb lens available upon request.

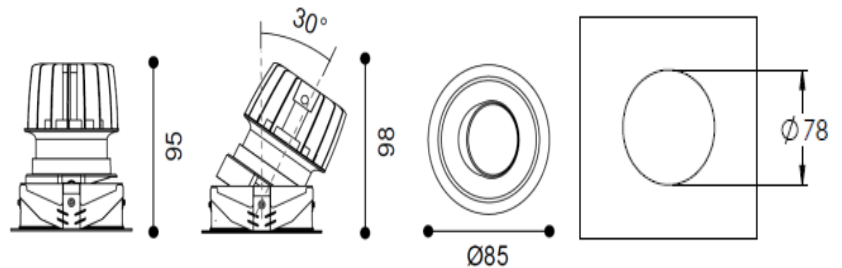


## Production Information

–  
**Physical**  
Mounting Type – Recessed (With Trim)  
Height – 98mm  
Diameter – 85mm  
Cutout – 78mm  
Finish – White/White  
IP Rating – IP44

–  
**Electrical**  
Lamp Type - LED  
Wattage – 12.9 W  
Efficacy – 109lm/W  
Driver – Tridonic/Osram  
Control – DALI2

–  
**LED**  
Manufacturer – Citizen  
LED Type – CLU02Q/1202E1  
Delivered lumen output – 1408lm  
CCT – 4000K  
CRI – 80+  
MacAdam – < 2  
Service Lifetime – L80/B10 72,000 Hrs

–  
**Optic**  
50°/ Clear

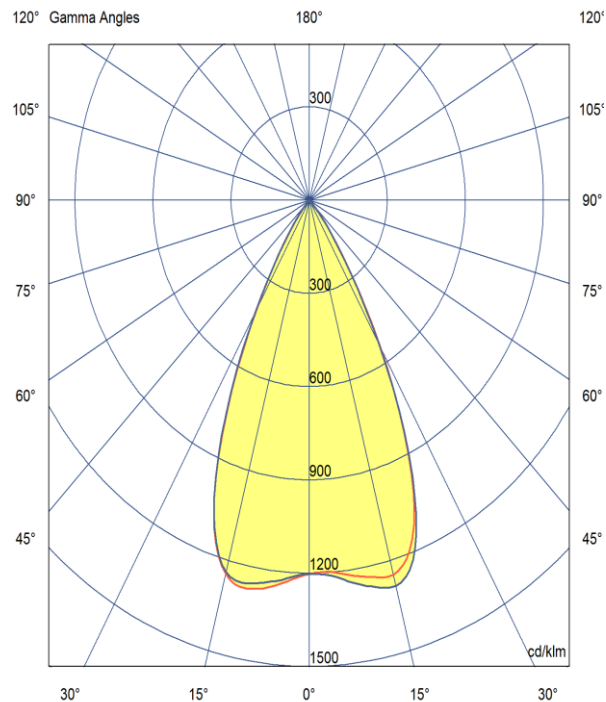

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

**MADE IN  
BRITAIN** **UK  
CA**