


TENUS SQUARE SNOOT

Part Code: **TSN 14 40 15 CL 115 ST WWB**



Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 1408 lm with overall luminaire efficacy of 109 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Forged aluminium heat sink with die-cast white or black bezel.

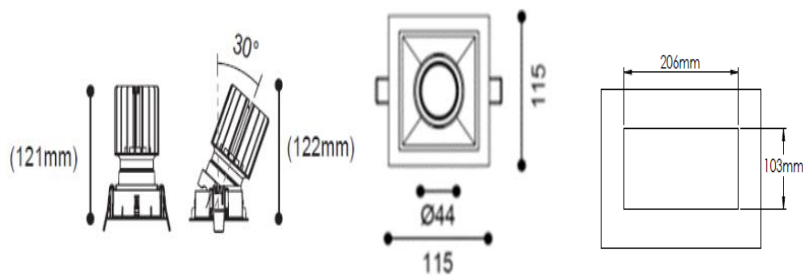

Production Information

–

Physical

Mounting Type – Recessed (With Trim)
 Length – 115mm
 Height – 122mm
 Width – 115mm
 Cutout – 206mmx103mm
 Finish – White/White/Black
 IP Rating – IP44

–

Electrical

Lamp Type - LED
 Wattage – 12.9 W
 Efficacy – 109 lm/W
 Driver – Tridonic/Osram
 Control – Fixed Output

–


LED

Manufacturer – Citizen
 LED Type – CLU028/120C4
 Delivered lumen output – 1408lm
 CCT – 4000K
 CRI – 80+
 MacAdam – < 2
 Service Lifetime – L80/B10 72,000 Hrs

–

Optic

15°/ Clear

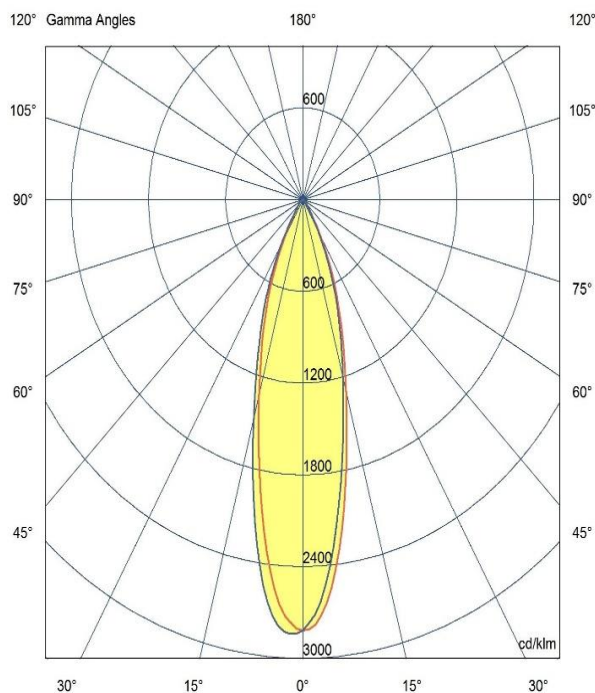

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
 T: +44(0) 191 3787960 E: info@artechlighting.com