


# NITOR IP65

ARTECH  
LIGHTING

Part Code: **ANI 68 40 MP 12030 S1 W D**



Artech Nitor recessed LED luminaire designed specifically for the demands of the modern workplace. Total luminous flux up to 7533 lm with overall luminaire efficacy up to 141 lm/W. Supplied with fixed output or DALI digital dimmable driver, optional 3-hour Basic or EMPRO emergency kit. Steel body finished in white. Microprism optics with high lumen output and luminance intensity control.

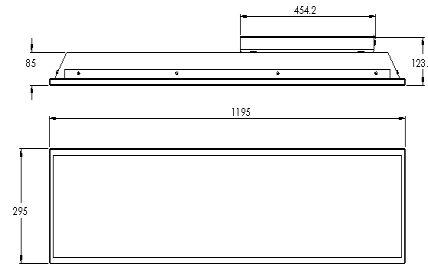


## Production Information

–  
**Physical**  
Mounting Type – Recessed (Lay-In)  
Length – 1195mm  
Height – 85mm  
Width – 295mm  
Finish – White  
IP Rating – IP65

–  
**Electrical**  
Lamp Type – LED  
Wattage – 48.2 W  
Efficacy – 141 lm/W  
Driver – Tridonic/Osram  
Control – DALI2

–  
**LED**  
Manufacturer – Light Engines Europe  
LED Type – LEE-250-250-STD-281-SAM  
Delivered lumen output – 6780lm  
CCT – 4000 K  
CRI – 80+  
MacAdam – < 3  
Service Lifetime – L80/B10 81,000hrs

–  
**Optic**  
Microprism Optic (UGR<19)

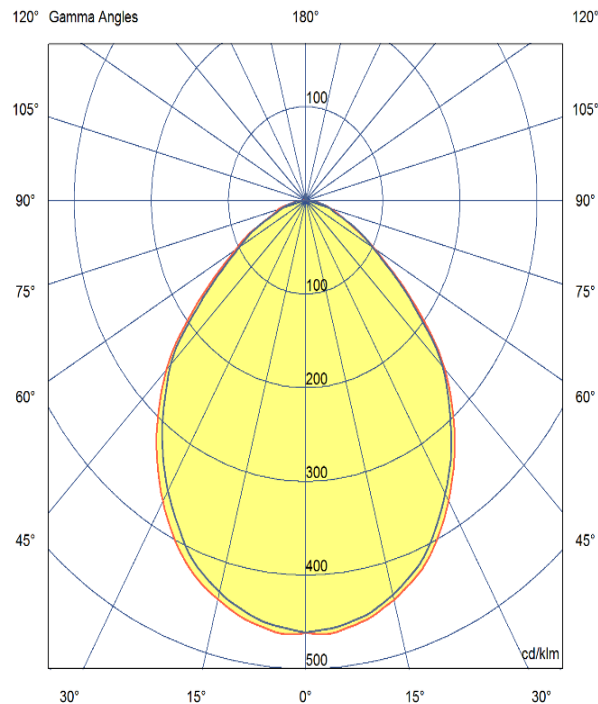

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom  
T: +44(0) 191 3787960 E: info@artechlighting.com