


Part Code: **APL 114 40 PC C S**



Artech Prolight architectural LED luminaire with ingress protection IP66. Total luminous flux up to 11,385 lm with overall luminaire efficacy up to 158 lm/W. Supplied with fixed output, DALI digital dimmable driver, optional 3 – hour Basic or EMPRO emergency kit. Steel housing with polycarbonate diffuser.

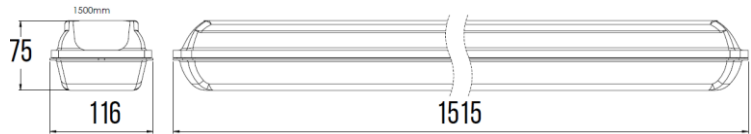


## Production Information

– **Physical**  
 Mounting Type – Surface  
 Length – 1515mm  
 Height – 75mm  
 Width – 116mm  
 Finish – Grey  
 IP Rating – IP66

– **Electrical**  
 Lamp Type – LED  
 Wattage – 70.9 W  
 Efficacy – 161 lm/W  
 Driver – Tridonic/Osram  
 Control – Fixed Output

– **LED**  
 Manufacturer – Light Engines Europe  
 LED Type – LEE-LINEAR-24-STD-SAM  
 LED Pitch – 9.33mm  
 Delivered lumen output – 11385 lm  
 CCT – 4000K  
 CRI – 80+  
 MacAdam – 3  
 Service Lifetime – L80/B10 81,000hrs

– **Optic**  
 Polycarbonate

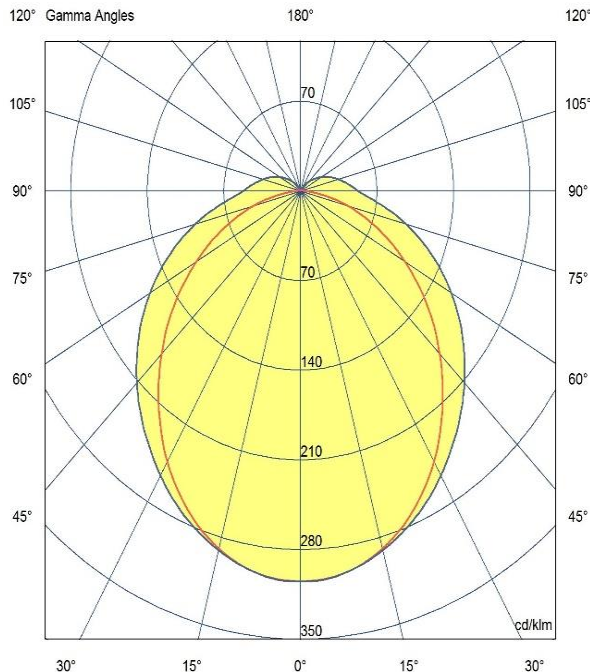

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**