


PROPACK SLIM

ARTECH
LIGHTING

Part Code: **APS 27 40 PC B S**



Artech Propack Slim LED surface mounted luminaire, with a polycarbonate diffuser and total luminous flux up to 4800lm with an overall efficacy of 120 lm/W. The Propack Slim can be used across various applications such as school and storage areas. Supplied with fixed output driver, optional 3 – hour Basic or Empro compatible emergency kit.

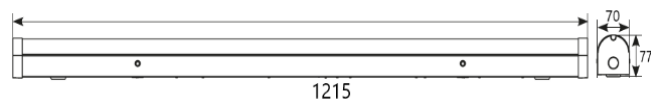


Production Information

–
Physical
Mounting Type – Surface
Length – 1215mm
Height – 77mm
Width – 70mm
Finish – White
IP Rating – IP20

–
Electrical
Lamp Type – LED
Wattage – 23 W
Efficacy – 120 lm/W
Driver – Tridonic/Osram
Control – Fixed Output

–
LED
Delivered lumen output – 2760 lm
CCT – 4000K
CRI – 80+
MacAdam – 3
Service Lifetime – L80/B10 50,000hrs

–
Optic
Polycarbonate

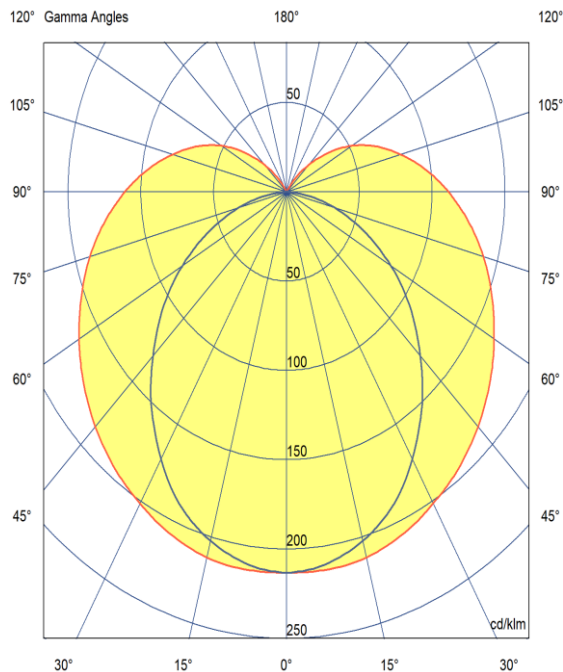

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

**MADE IN
BRITAIN** **UK
CA**