


# PROPACK SLIM

ARTECH  
LIGHTING

Part Code: **APS 72 40 PC B S**



Artech Propack Slim LED surface mounted luminaire, with a polycarbonate diffuser and total luminous flux up to 7200lm with an overall efficacy of 120 lm/W. The Propack Slim can be used across various applications such as school and storage areas. Supplied with fixed output driver, optional 3 – hour Basic or Empro compatible emergency kit.




## Production Information

–  
**Physical**  
Mounting Type – Surface  
Length – 1515mm  
Height – 77mm  
Width – 70mm  
Finish – White  
IP Rating – IP20

–  
**Electrical**  
Lamp Type – LED  
Wattage – 60 W  
Efficacy – 120 lm/W  
Driver – Tridonic/Osram  
Control – Fixed Output

–  
**LED**  
Delivered lumen output – 7200 lm  
CCT – 4000K  
CRI – 80+  
MacAdam – 3  
Service Lifetime – L80/B10 50,000hrs

–  
**Optic**  
Polycarbonate

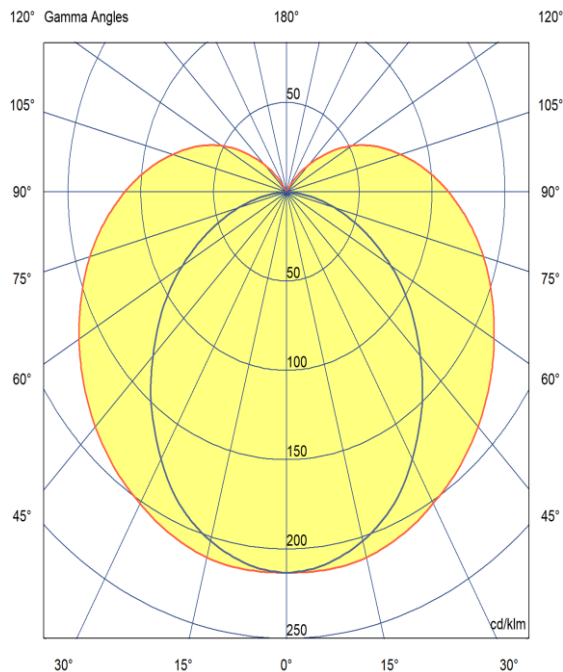

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

**MADE IN  
BRITAIN** **UK  
CA**