


QUADRUS

ARTECH
LIGHTING

Part Code: **QUF 100 40 30 5 RT WB**



Architectural linear LED system for Recessed application. Total luminous flux up to 3000 lm with overall luminaire efficacy of 91 lm/W. Supplied with fixed output or DALI digital dimmable driver, optional - basic 3hr, self-test or EMPRO emergency kit. Aluminium extruded body in white or black finish. Beam angle available 15, 30 or 40 Degree.

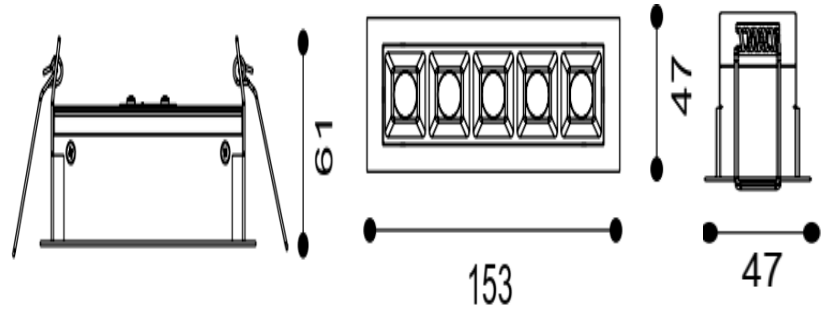


Production Information

–
Physical
Mounting Type – Recessed (With Trim)
Length – 153mm
Height – 61mm
Width – 47mm
Finish – White/Black
IP Rating – IP20

–
Electrical
Lamp Type – LED
Wattage – 11 W
Efficacy – 91lm/W
Driver – Tridonic/Osram
Control – Fixed Output

–
LED
Delivered lumen output – 1000lm
CCT – 4000K
CRI – 90+
MacAdam – < 3
Service Lifetime – L80/B10 55,000hrs

–
Optic
30° Beam Angle

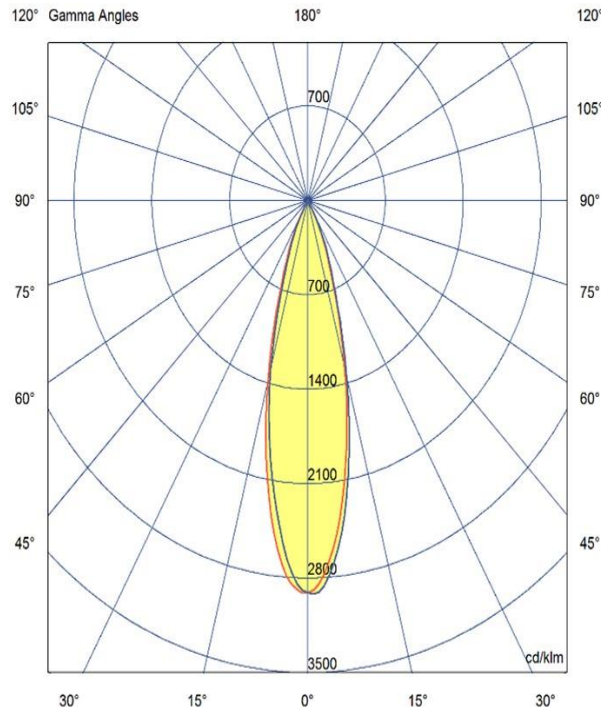

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

MADE IN
BRITAIN UK
CA