


Part Code: **AFM 26-11 MP 40 E W W**



Architectural linear LED system for Wall Mounted applications. Total luminous flux of up to 5139 lm with overall luminaire efficacy 130 lm/W. Supplied with fixed output or DALI digital dimmable drive. Optional - basic 3hr, self-test or EMPRO emergency kit providing a total of 520lm in emergency mode. Aluminium extruded body in white, black, or silver finish. MPO (UGR 19) optic with high lumen output and luminance intensity control.

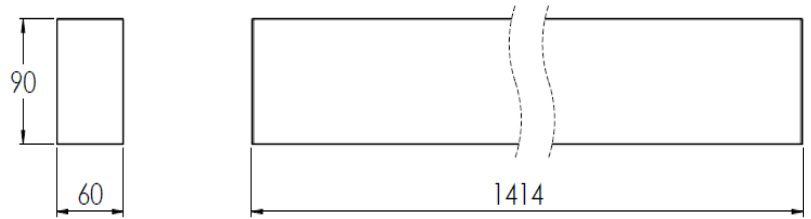


## Production Information

–  
**Physical**  
 Mounting Type – Wall Mounted  
 Length – 1414mm  
 Height – 90mm  
 Width – 60mm  
 Finish – White  
 RAL – 9010  
 IP Rating – IP20

–  
**Electrical**  
 Lamp Type – LED  
 Wattage – 25.7 W  
 Efficacy – 130 lm/W  
 Driver – Tridonic/Osram  
 Control – Fixed Output

–  
**LED**  
 Manufacturer – Tridonic  
 LED – Module\_LLE\_24mm\_1250lm\_HV\_ADV6  
 LED Pitch – 5mm  
 Delivered lumen output – 2570 lm Dn 1101 lm Up  
 CCT – 4000K  
 CRI – 80+  
 MacAdam – < 3  
 Service Lifetime – L90/B10 72,000hrs

–  
**Optic**  
 Microprism Optic (UGR<19)

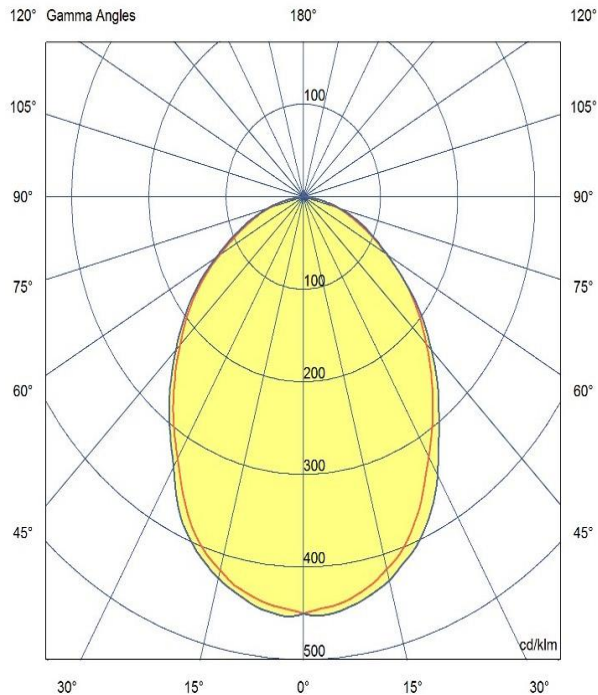

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**