


Part Code: **AFM 31-13 MP 40 F W W**



Architectural linear LED system for Wall Mounted applications. Total luminous flux of up to 6160 lm with overall luminaire efficacy 130 lm/W. Supplied with fixed output or DALI digital dimmable drive. Optional - basic 3hr, self-test or EMPRO emergency kit providing a total of 520lm in emergency mode. Aluminium extruded body in white, black, or silver finish. MPO (UGR 19) optic with high lumen output and luminance intensity control.

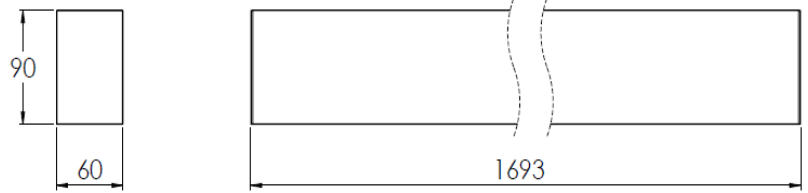


Production Information

–
Physical
 Mounting Type – Wall Mounted
 Length – 1693mm
 Height – 90mm
 Width – 60mm
 Finish – White
 RAL – 9010
 IP Rating – IP20

–
Electrical
 Lamp Type – LED
 Wattage – 30.8 W
 Efficacy – 130 lm/W
 Driver – Tridonic/Osram
 Control – Fixed Output

–
LED
 Manufacturer – Tridonic
 LED – Module_LLE_24mm_1250lm_HV_ADV6
 LED Pitch – 5mm
 Delivered lumen output – 3081 lm Dn 1320 lm Up
 CCT – 4000K
 CRI – 80+
 MacAdam – < 3
 Service Lifetime – L90/B10 72,000hrs

–
Optic
 Microprism Optic (UGR<19)

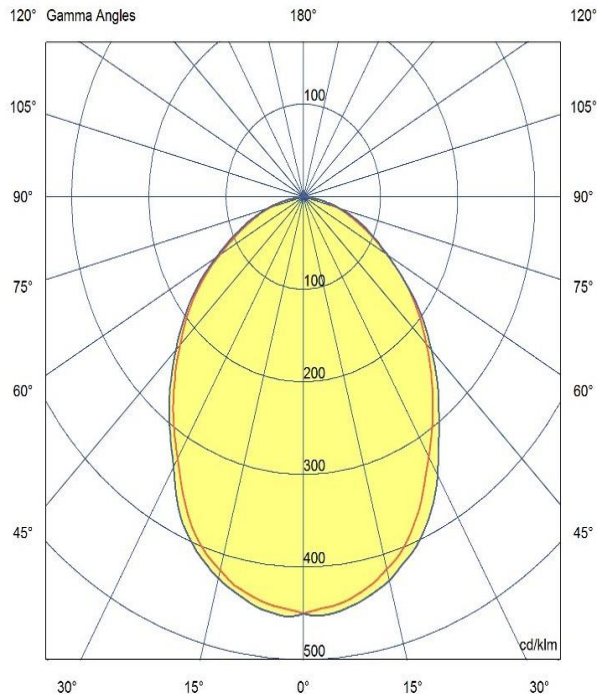

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com