



# FLOWLINE POD



Part Code: **AFP 10 WO 40 C S W**

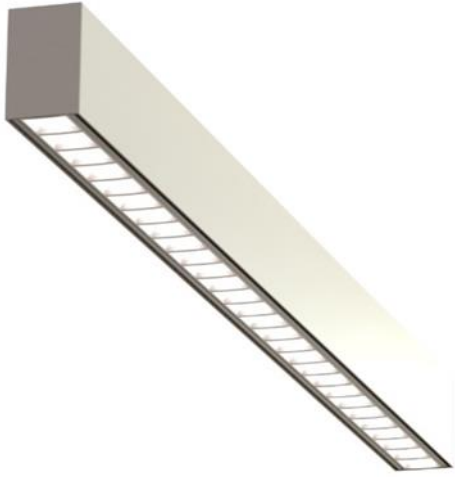

Architectural linear LED pod system for Surface applications. Total luminous flux of up to 9334lm with overall luminaire efficacy 152 lm/W. Supplied with fixed output or DALI digital dimmable drive. Optional - basic 3hr, self-test or EMPRO emergency kit providing a total of 520lm in emergency mode. Aluminium extruded body in white, black, or silver finish. Pod optic with high lumen output and luminance intensity control.

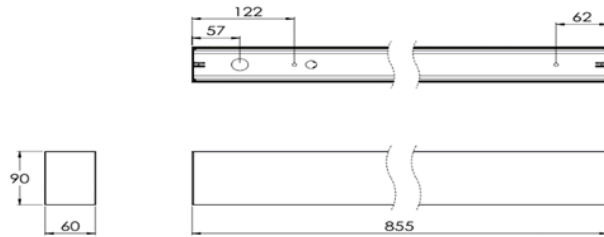


## Production Information

–  
**Physical**  
Mounting Type – Surface  
Length – 850mm  
Height – 90mm  
Width – 60mm  
Finish – Black  
RAL – 9005  
IP Rating – IP20

–  
**Electrical**  
Lamp Type – LED  
Wattage – 6.6 W  
Efficacy – 152 lm/W  
Driver – Tridonic/Osram  
Control – Fixed Output

–  
**LED**  
Manufacturer – Tridonic  
LED – Module\_LLE\_24mm\_1250lm\_HV\_ADV6  
LED Pitch – 5mm  
Delivered lumen output – 1008 lm  
CCT – 4000K  
CRI – 80+  
MacAdam – < 3  
Service Lifetime – L90/B10 72,000hrs

–  
**Optic**  
Pod Optic

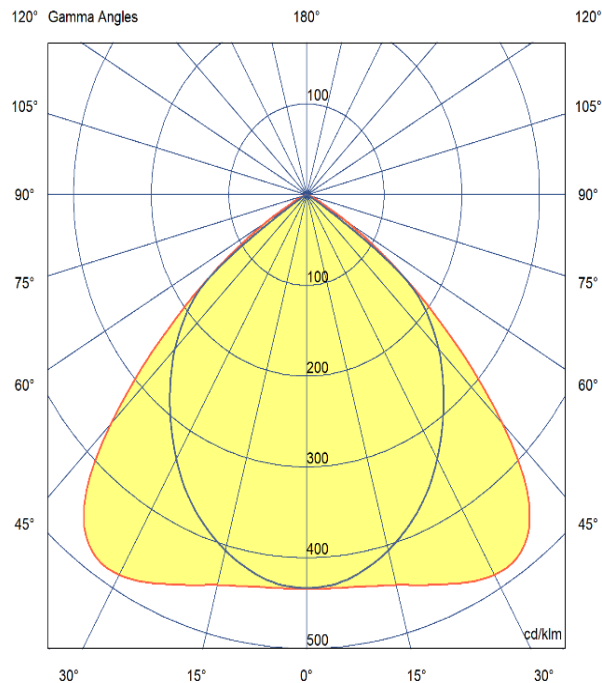

technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

