



# FLOWLINE POD

ARTECH  
LIGHTING

Part Code: **AFP 14 WO 40 B R W**

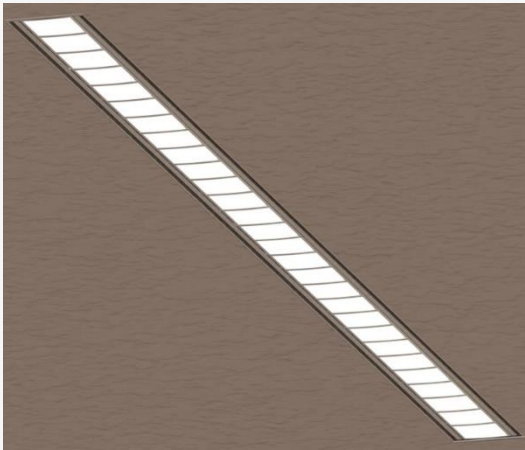

Architectural linear LED pod system for recessed (Trimless) applications. Total luminous flux of up to 9334lm with overall luminaire efficacy 152 lm/W. Supplied with fixed output or DALI digital dimmable drive. Optional - basic 3hr, self-test or EMPRO emergency kit providing a total of 520lm in emergency mode. Aluminium extruded body in white, black, or silver finish. Pod optic with high lumen output and luminance intensity control.

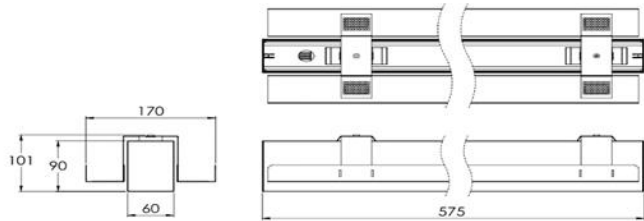


## Production Information

–  
**Physical**  
Mounting Type – Recessed (Trimless)  
Length – 570mm  
Height – 90mm  
Width – 60mm  
Finish – White  
RAL – 9010  
IP Rating – IP20

–  
**Electrical**  
Lamp Type – LED  
Wattage – 8.8 W  
Efficacy – 152 lm/W  
Driver – Tridonic/Osram  
Control – Fixed Output

–  
**LED**  
Manufacturer – Tridonic  
LED – Module\_LLE\_24mm\_1250lm\_HV\_ADV6  
LED Pitch – 5mm  
Delivered lumen output – 1352 lm  
CCT – 4000K  
CRI – 80+  
MacAdam – < 3  
Service Lifetime – L90/B10 72,000hrs

–  
**Optic**  
Pod Optic

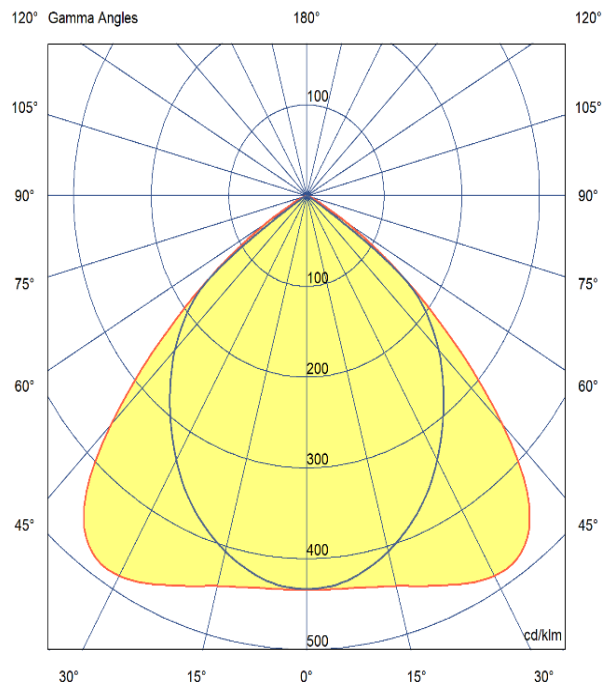

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

**MADE IN  
BRITAIN** **UK  
CA**