



FLOWLINE POD

ARTECH
LIGHTING

Part Code: **AFP 33 WO 40 E R W**

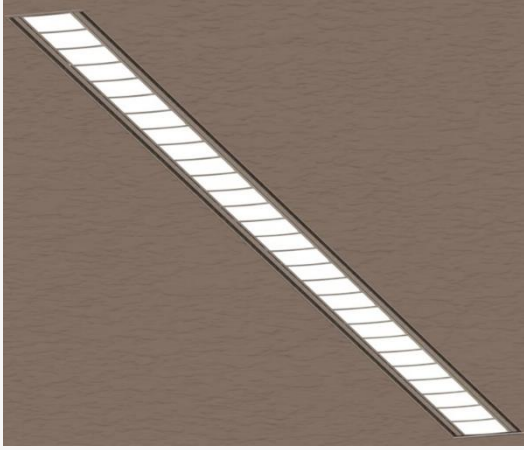

Architectural linear LED pod system for recessed (Trimless) applications. Total luminous flux of up to 9334lm with overall luminaire efficacy 152 lm/W. Supplied with fixed output or DALI digital dimmable drive. Optional - basic 3hr, self-test or EMPRO emergency kit providing a total of 520lm in emergency mode. Aluminium extruded body in white, black, or silver finish. Pod optic with high lumen output and luminance intensity control.

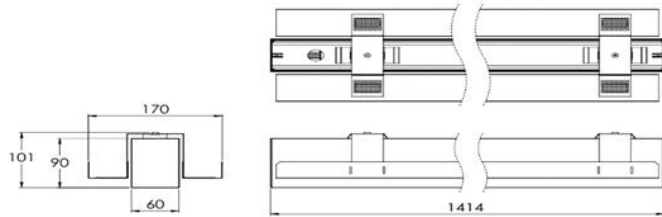


Production Information

–
Physical
Mounting Type – Recessed (Trimless)
Length – 1410mm
Height – 90mm
Width – 60mm
Finish – White
RAL – 9010
IP Rating – IP20

–
Electrical
Lamp Type – LED
Wattage – 21.9 W
Efficacy – 152 lm/W
Driver – Tridonic/Osram
Control – Fixed Output

–
LED
Manufacturer – Tridonic
LED – Module_LLE_24mm_1250lm_HV_ADV6
LED Pitch – 5mm
Delivered lumen output – 3344 lm
CCT – 4000K
CRI – 80+
MacAdam – < 3
Service Lifetime – L90/B10 72,000hrs

–
Optic
Pod Optic

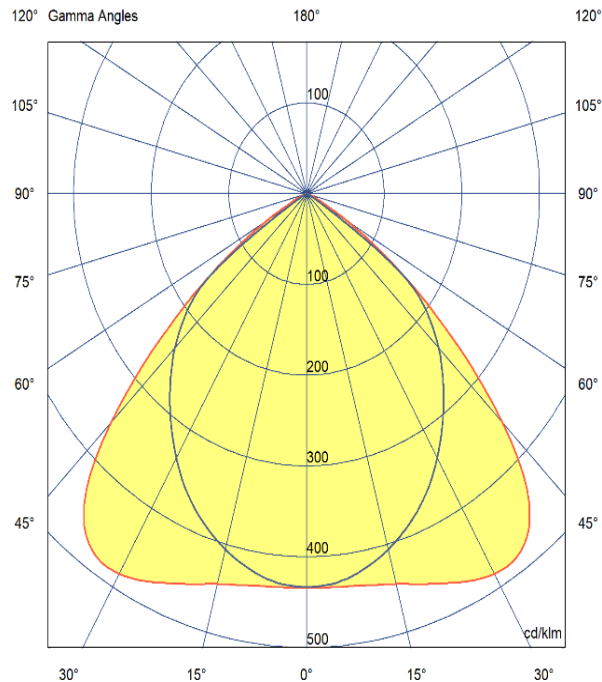

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

**MADE IN
BRITAIN** **UK
CA**