



Part Code: **AFS 54 MP 40 G P W**

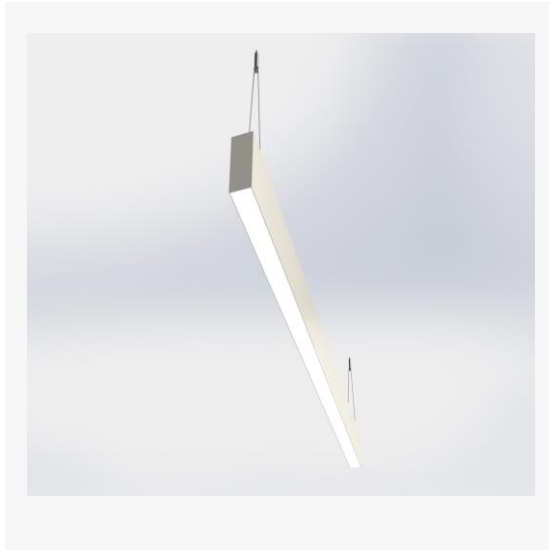

Architectural linear LED system for pendant applications. Total luminous flux of up to 7181 lm with overall luminaire efficacy 130 lm/W. Supplied with fixed output or DALI digital dimmable drive. Optional - basic 3hr, self-test or EMPRO emergency kit providing a total of 520lm in emergency mode. Aluminium extruded body in white, black, or silver finish. MPO (UGR 19) optic with high lumen output and luminance intensity control.

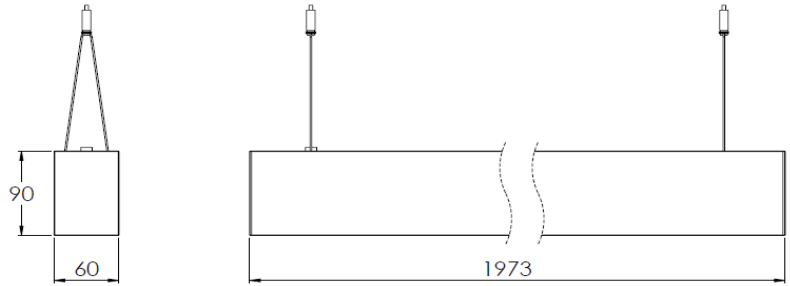


Production Information

– **Physical**
 Mounting Type – Pendant
 Length – 1970mm
 Height – 90mm
 Width – 60mm
 Finish – White
 RAL – 9010
 IP Rating – IP20

– **Electrical**
 Lamp Type – LED
 Wattage – 41.4 W
 Efficacy – 130 lm/W
 Driver – Tridonic/Osram
 Control – Fixed Output

– **LED**
 Manufacturer – Tridonic
 LED – Module_LLE_24mm_1250lm_HV_ADV6
 LED Pitch – 5mm
 Delivered lumen output – 5386 lm
 CCT – 4000K
 CRI – 80+
 MacAdam – < 3
 Service Lifetime – L90/B10 72,000hrs

– **Optic**
 Microprism Optic (UGR 19)

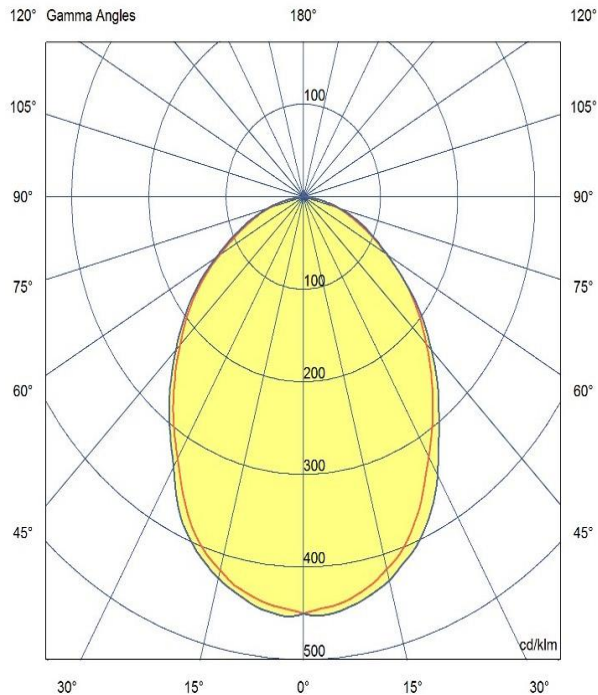

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com