


Part Code: **TEL 37-09 MP 40 1300 B P W D**

Artech Lighting Telum Luminaire for suspended or surface applications. Overall luminaire efficacy 140 lm/W. Supplied with Pre-fabricated rear cable route channel with optional infill sections and PIR/Microwave sensors. Optional - basic 3hr, self-test or EMPRO emergency kit. Aluminium extruded body in white, black or silver finish. Microprism optic with high lumen output and luminance intensity control.

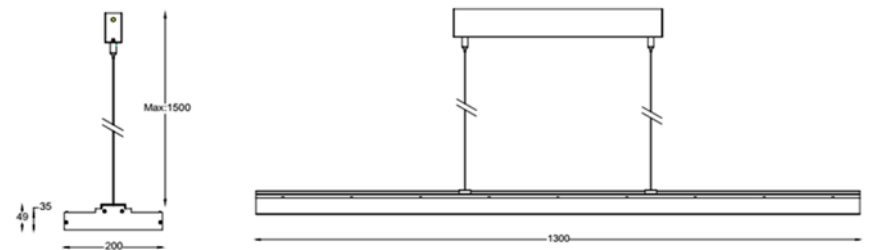


## Production Information

**Physical**  
 Mounting Type – Pendant  
 Length – 1300mm  
 Height – 50mm  
 Width – 200mm  
 Finish – White  
 RAL – 9010  
 IP Rating – IP40

**Electrical**  
 Lamp Type – LED  
 Wattage – 33.3 W  
 Efficacy – 140 lm/W  
 Driver – Tridonic/Osram  
 Control – DALI2

**LED**  
 Manufacturer – Osram  
 LED Type – SMD LED 3030  
 Delivered lumen output – 3733 lm Dn 933 lm Up  
 CCT – 4000K  
 CRI – 80+  
 MacAdam – < 3  
 Service Lifetime – L90/B10 – 60,000 Hrs

**Optic**  
 Microprism Optic (UGR<19)

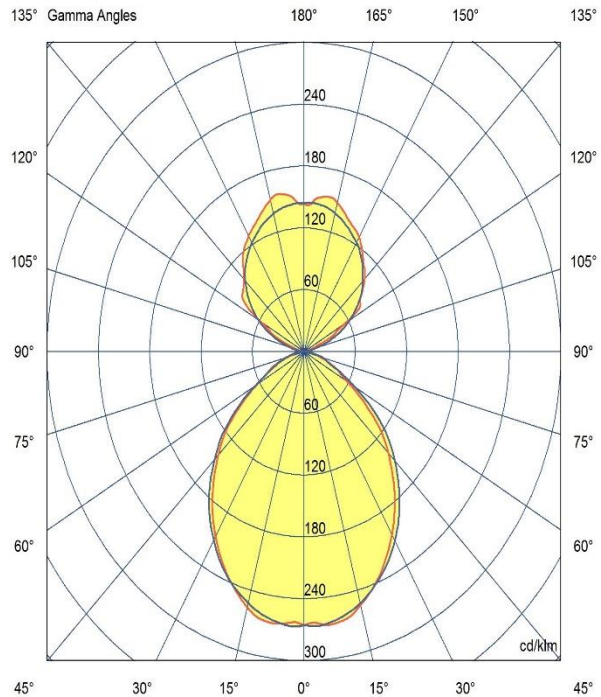

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**