


Part Code: **TEL 47-12 MP 40 1300 B P W D**

Artech Lighting Telum Luminaire for suspended or surface applications. Overall luminaire efficacy 140 lm/W. Supplied with Pre-fabricated rear cable route channel with optional infill sections and PIR/Microwave sensors. Optional - basic 3hr, self-test or EMPRO emergency kit. Aluminium extruded body in white, black or silver finish. Microprism optic with high lumen output and luminance intensity control.

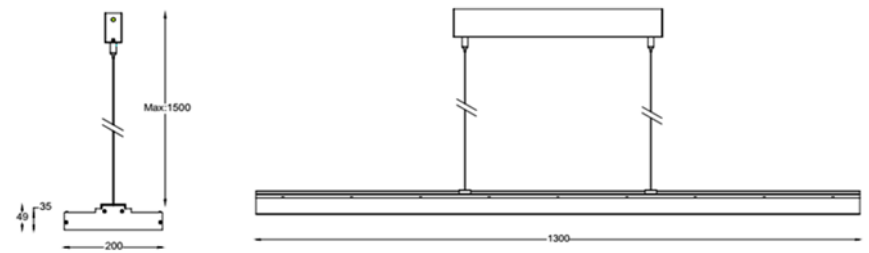


Production Information

–
Physical
 Mounting Type – Pendant
 Length – 1300mm
 Height – 50mm
 Width – 200mm
 Finish – White
 RAL – 9010
 IP Rating – IP40

–
Electrical
 Lamp Type – LED
 Wattage – 41.7 W
 Efficacy – 140 lm/W
 Driver – Tridonic/Osram
 Control – DALI2

–
LED
 Manufacturer – Osram
 LED Type – SMD LED 3030
 Delivered lumen output – 4667 lm Dn 1167 lm Up
 CCT – 4000K
 CRI – 80+
 MacAdam – < 3
 Service Lifetime – L90/B10 – 60,000 Hrs

–
Optic
 Microprism Optic (UGR<19)

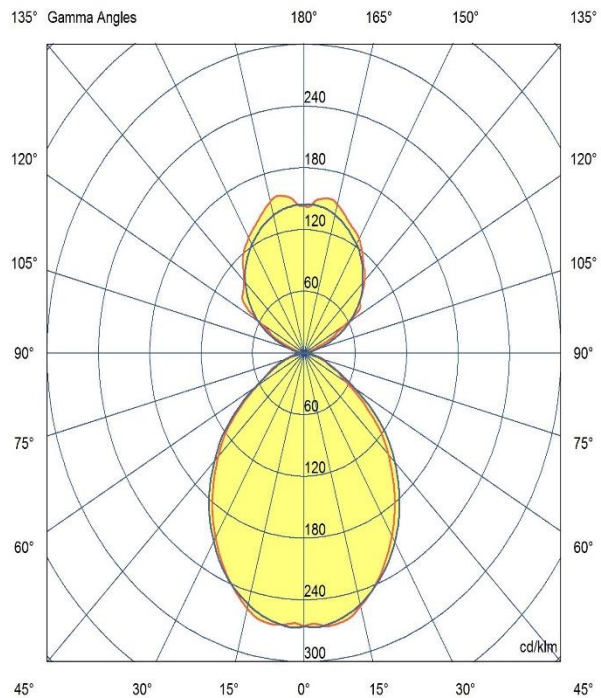

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com