


# NITOR SLIM

ARTECH  
LIGHTING

Part Code: **ANS 26 40 MP 12030 S1 W**

Artech Nitor Slim recessed LED luminaire designed specifically for the demands of the modern workplace. Backlit LED Technology to provide luminous flux up to 5600 lm with overall luminaire efficacy of 140 lm/W. Supplied with fixed output or DALI digital dimmable driver, optional 3-hour Basic or EMPRO emergency kit. TP(a) rated and Steel body finished in white. Microprism optics with high lumen output and luminance intensity control.

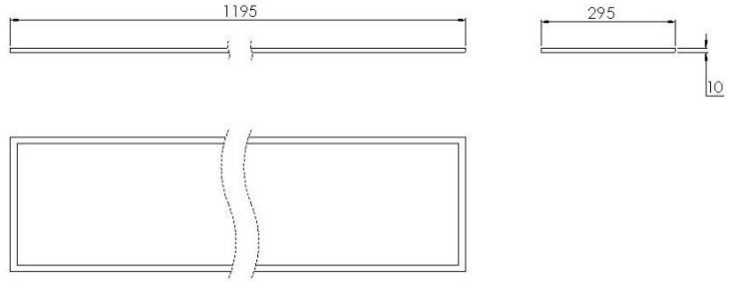


## Production Information

–  
**Physical**  
Mounting Type – Recessed (Lay-In)  
Length – 1200mm  
Height – 30mm  
Width – 300mm  
Finish – White  
IP Rating – IP44

–  
**Electrical**  
Lamp Type – LED  
Wattage – 18.8 W  
Efficacy – 140 lm/W  
Driver – Tridonic  
Control – Fixed Output

–  
**LED**  
Manufacturer – Bridgelux  
LED Type – SMD2835  
Delivered lumen output – 2635lm  
CCT – 4000K  
CRI – 80+  
MacAdam – < 3  
Service Lifetime – L85/B10 50,000hrs

–  
**Optic**  
Microprism Optic (UGR<19)

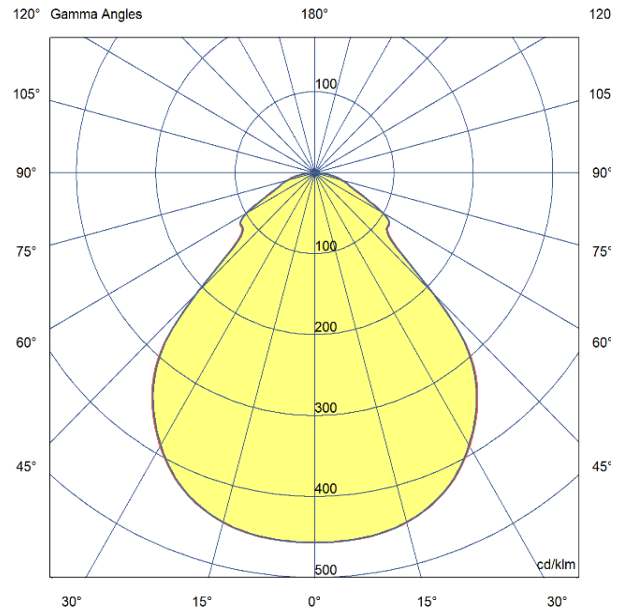

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

**MADE IN  
BRITAIN** **UK  
CA**