


NITOR SLIM

ARTECH
LIGHTING

Part Code: **ANS 36 40 MP 12030 S1 W**

Artech Nitor Slim recessed LED luminaire designed specifically for the demands of the modern workplace. Backlit LED Technology to provide luminous flux up to 5600 lm with overall luminaire efficacy of 140 lm/W. Supplied with fixed output or DALI digital dimmable driver, optional 3-hour Basic or EMPRO emergency kit. TP(a) rated and Steel body finished in white. Microprism optics with high lumen output and luminance intensity control.

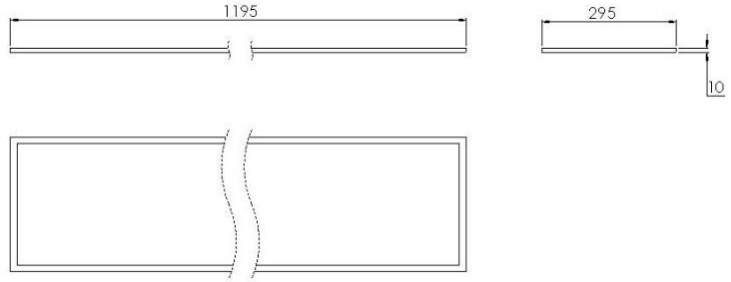


Production Information

–
Physical
Mounting Type – Recessed (Lay-In)
Length – 1200mm
Height – 30mm
Width – 300mm
Finish – White
IP Rating – IP44

–
Electrical
Lamp Type – LED
Wattage – 25.9 W
Efficacy – 140 lm/W
Driver – Tridonic
Control – Fixed Output

–
LED
Manufacturer – Bridgelux
LED Type – SMD2835
Delivered lumen output – 3624lm
CCT – 4000K
CRI – 80+
MacAdam – < 3
Service Lifetime – L85/B10 50,000hrs

–
Optic
Microprism Optic (UGR<19)

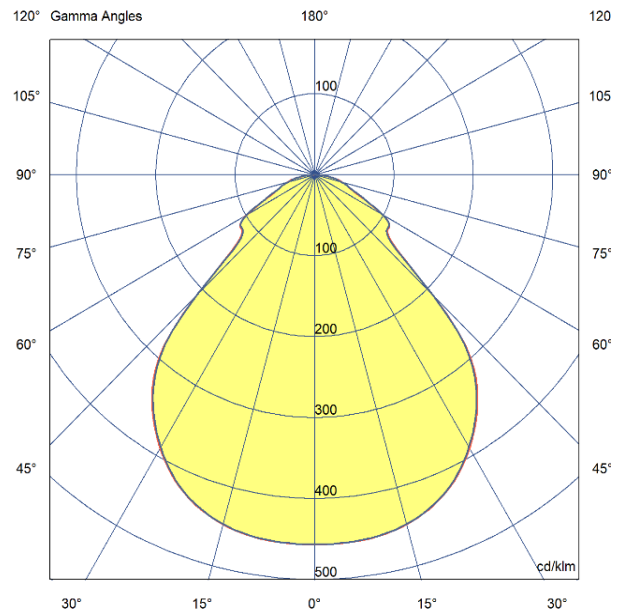

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

**MADE IN
BRITAIN** **UK
CA**