


Part Code: **NAI 1700 120 40 10 67**



Artech flexible LED strip is architectural solution for cove lighting or edge lighting, with 4000K Colour temperature. Total luminous flux up to 1700 lm/m with overall luminaire efficacy up to 118 lm/W. Low heat and low maintenance costs. White PVC base edge to increase luminosity.

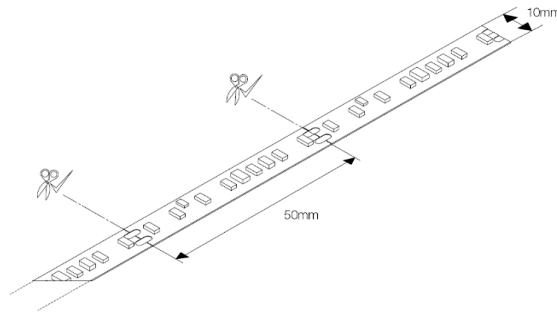


## Production Information

–  
**Physical**  
 Max Length – 10,000mm  
 Cut Point – 50mm  
 Width – 10mm  
 Finish – White  
 IP Rating – IP67  
 LEDs p/m – 120 LEDs p/m

–  
**Electrical**  
 Lamp Type – LED  
 Wattage – 14.4 W  
 Efficacy – 118 lm/W  
 Input Voltage – 24 V

–  
**LED**  
 LED Type – SMD2835  
 Delivered lumen output – 1700lm/m  
 CCT – 4000K  
 CRI – 90+  
 MacAdam – < 3  
 Service Lifetime – L80/B10 50,000 Hrs

–  
**Optic**  
 120° Beam Angle

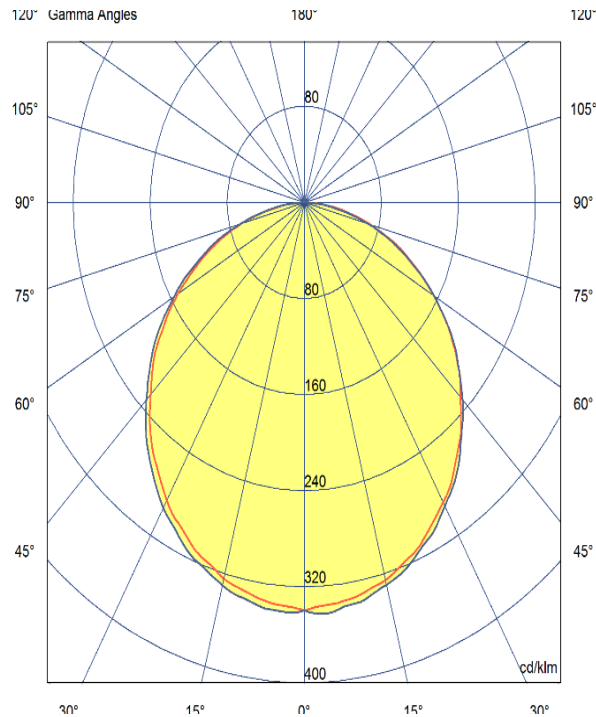

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

**St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom**  
**T: +44(0) 191 3787960 E: info@artechlighting.com**

Powered by:

**TRIDONIC**

**MADE IN UK  
BRITAIN CA**