


Part Code: **TUB 07 40 60 CL 400 P W D**



Artech Tubo pendant architectural fixed LED downlight with ingress protection IP20. Total luminous flux up to 1400 lm with overall luminaire efficacy of 100lm/W. Supplied with DALI digital or phase-cut dimmable driver. Extruded aluminum housing and pressed steel ceiling rose available in white or black. Overall suspension length available up to 1500mm.

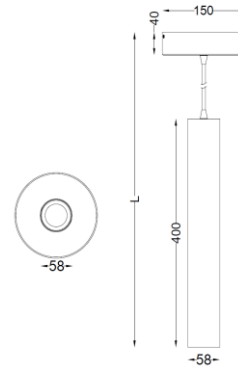

Production Information

–

Physical

Mounting Type – Pendant
 Max Suspension Length – 1500mm
 Length – 400mm
 Diameter – 58mm
 Ceiling Rose – 150 Dia x 400mm
 Finish – White
 IP Rating – IP20

–

Electrical

Lamp Type – LED
 Wattage – 7 W
 Efficacy – 100lm/W
 Driver – Tridonic/Forge
 Control – DALI2

–


LED

Manufacturer – Phillips Lumileds
 LED Type – COB 1203
 Delivered lumen output – 700lm
 CCT – 4000K
 CRI – 80+
 MacAdam – < 3
 Service Lifetime – L80/B10 55,000hrs

–

Optic

60° Beam Angle/ Clear Optic

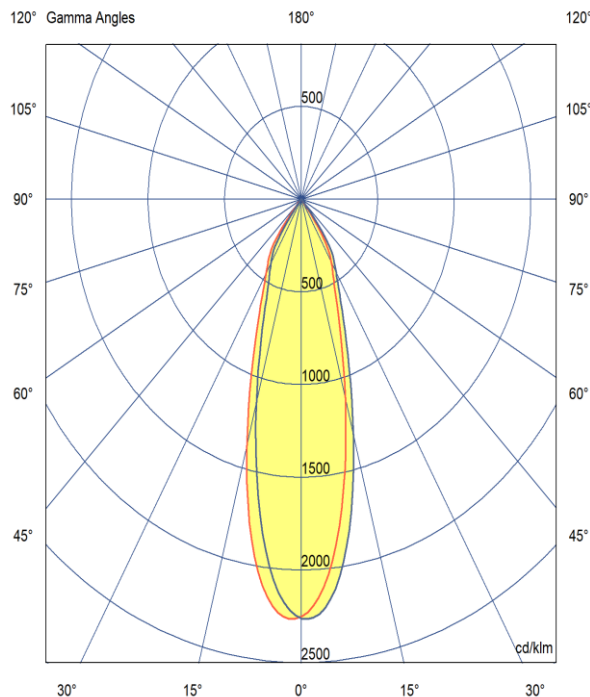

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin.

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ, United Kingdom
T: +44(0) 191 3787960 E: info@artechlighting.com

Powered by:

TRIDONIC

MADE IN BRITAIN UK CA